

1. Report No. FHWA/TX-98/1752-2		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle ITS DATA MANAGEMENT SYSTEM: YEAR ONE ACTIVITIES				5. Report Date August 1997	
				6. Performing Organization Code	
7. Author(s) Shawn M. Turner, Robert E. Brydia, Jyh C. Liu, and William L. Eisele				8. Performing Organization Report No. Research Report 1752-2	
9. Performing Organization Name and Address Texas Transportation Institute The Texas A&M University System College Station, Texas 77843-3135				10. Work Unit No. (TRAIS)	
				11. Contract or Grant No. Study No. 0-1752	
12. Sponsoring Agency Name and Address Texas Department of Transportation Research and Technology Transfer Office P. O. Box 5080 Austin, Texas 78763-5080				13. Type of Report and Period Covered Research Report: September 1996 - August 1997	
				14. Sponsoring Agency Code	
15. Supplementary Notes Research performed in cooperation with the Texas Department of Transportation and the U.S. Department of Transportation, Federal Highway Administration. Research Study Title: TransLink <sup>®</sup> Research Program					
16. Abstract  This report documents research conducted in the development of an ITS data management system, hereafter referred to as "ITS DataLink." The objective of the ITS DataLink system is to retain, manage, share, and analyze ITS data for a variety of transportation analyses. A survey of selected traffic management centers found a number of issues related to the retention and sharing of ITS data, including institutional communication and data management issues. Initial sections of this report include these and other survey findings. Background information is also provided on the definition and selection of transportation performance measures.  Later sections of this report contain specific information on the development of the ITS DataLink system. Based upon the literature review, the report summarizes applicable performance measures that can easily be calculated with ITS data. The report includes examples of performance measure calculation using ITS data from the TransGuide center in San Antonio, Texas. The report documents the desirable features of an ITS data management system. The final sections of the report contain documentation of the web browser-based ITS DataLink system, which has been undergoing online testing and refinement since early 1997. The report concludes with findings on ITS data management systems and contains recommendations for future refinements of the ITS DataLink system.					
17. Key Words Data Warehouse, Data Management, Performance Measures, Traffic Management Centers, Loop Detectors, ITS, ATMS			18. Distribution Statement No restrictions. This document is available to the public through NTIS: National Technical Information Service 5285 Port Royal Road Springfield, Virginia 22161		
19. Security Classif.(of this report) Unclassified		20. Security Classif.(of this page) Unclassified		21. No. of Pages 66	22. Price



# **ITS DATA MANAGEMENT SYSTEM: YEAR ONE ACTIVITIES**

by

Shawn M. Turner  
Assistant Research Engineer  
Texas Transportation Institute

Robert E. Brydia  
Assistant Research Scientist  
Texas Transportation Institute

Jyh C. Liu  
Assistant Professor  
Department of Computer Science  
Texas A&M University

and

William L. Eisele  
Assistant Research Scientist  
Texas Transportation Institute

Research Report 1752-2  
Research Study Number 0-1752  
Research Study Title: TransLink<sup>®</sup> Research Program

Sponsored by the  
Texas Department of Transportation  
In Cooperation with  
U.S. Department of Transportation  
Federal Highway Administration

August 1997

TEXAS TRANSPORTATION INSTITUTE  
The Texas A&M University System  
College Station, Texas 77843-3135



## **DISCLAIMER**

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the Texas Department of Transportation or the Federal Highway Administration. This report does not constitute a standard, specification, or regulation. Shawn Turner (Texas certification number 82781), Robert Brydia, Jyh (Steve) Liu, and William Eisele prepared this report.

## ACKNOWLEDGMENTS

The authors wish to acknowledge the hard work and dedication of several graduate students in Texas A&M University's Department of Computer Science who assisted in development of the ITS DataLink system:

- Mr. Gang Feng: web pages, CGI-BIN;
- Dr. Dongkyoo Shin: database tables design and implementation;
- Mr. Mike Thomadakis: distributed process control, database, graphics; and,
- Mr. Byeong-Ki Yoo: database SQL and CGI-BIN.

The authors wish to thank the numerous traffic management center (TMC) professionals contacted throughout this study. Any misstatements of their ITS data applications or experience with managing and sharing ITS data are solely the responsibility of the authors.

This research is being performed in cooperation with the TransLink™ Research Center. The TransLink® Partnership includes the Texas Department of Transportation (TxDOT), Metropolitan Transit Authority of Harris County (METRO), United States Department of Transportation (US DOT), Rockwell International, Southwestern Bell-Technology Resources, and the Texas Transportation Institute (TTI).

The authors also acknowledge the support and assistance of Mr. Christopher Poe, who provides overall leadership and direction for the TransLink® Research Program at TTI.

# TABLE OF CONTENTS

	<b>PAGE</b>
LIST OF FIGURES .....	ix
LIST OF TABLES .....	x
1 INTRODUCTION .....	1
1.1 Problem Statement .....	1
1.2 Research Objectives and Scope .....	1
1.3 Organization of Report .....	2
2 BACKGROUND .....	3
2.1 Review of ITS Data Retention and Management Practices .....	3
2.1.1 Phoenix Traffic Operations Center .....	5
2.1.2 Los Angeles District 7 Traffic Management Center .....	6
2.1.3 San Francisco Bay Area Traffic Management Center .....	7
2.1.4 Georgia DOT Advanced Transportation Management System .....	7
2.1.5 Illinois Traffic Systems Center .....	8
2.1.6 Montgomery County Transportation Management Center .....	8
2.1.7 Detroit, Michigan ITS Center .....	8
2.1.8 Minneapolis, Minnesota Traffic Management Center .....	9
2.1.9 TRANSCOM .....	10
2.1.10 INFORM .....	10
2.1.11 MetroCommute .....	11
2.1.12 TranStar Traffic Management Center .....	11
2.1.13 TransGuide Advanced Traffic Management System .....	11
2.1.14 North Seattle Advanced Traffic Management System (ATMS) .....	12
2.1.15 Toronto's COMPASS .....	12
2.1.16 Summary of Findings .....	14
2.2 Summary of Data Retention and Management Practices .....	15
2.3 Performance Measures Based Upon Goals and Objectives .....	17
2.4 Previous Research on Transportation Performance Measures .....	17
2.5 Summary of Performance Measure Research .....	28
3 APPLICATIONS AND PERFORMANCE MEASURES USING ITS DATA .....	29
3.1 Identifying Needs and Potential Uses for ITS Data .....	29
3.2 Estimating Performance Measures from ITS Data .....	32
3.3 Example Calculation of Performance Measures from ITS Data .....	33

## TABLE OF CONTENTS (Continued)

	<b>PAGE</b>
4 DEVELOPMENT OF AN ITS DATA MANAGEMENT SYSTEM .....	41
4.1 Background .....	41
4.1.1 Data Storage .....	41
4.1.2 Database Construction .....	42
4.1.3 Access to Data .....	42
4.1.4 Data Versus Information .....	43
4.1.5 Privacy .....	43
4.2 Data Management System Features .....	44
4.2.1 Data Storage .....	44
4.2.2 Database Access .....	45
4.2.3 User Interface .....	45
4.2.4 Data Aggregation and Summarization .....	46
4.2.5 Calculate Performance Measures .....	47
4.2.6 Tabular and Graphical Output Formats .....	47
4.3 Documentation of the Prototype Data Management System .....	48
4.3.1 System Architecture .....	48
4.3.2 ITS DataLink System Cost .....	50
5 FINDINGS AND CONCLUSIONS .....	51
6 RECOMMENDATIONS .....	53
7 REFERENCES .....	55



## LIST OF FIGURES

	<b>PAGE</b>
Figure 2-1. Geographic Location of TMCs Interviewed in the Study .....	5
Figure 2-2. Performance-Based Planning Process .....	18
Figure 3-1. Phase One of TransGuide, San Antonio, Texas .....	34
Figure 3-2. Example of Loop Detector Data from TransGuide .....	34
Figure 4-1. Data Flow for ITS DataLink System .....	49

## LIST OF TABLES

	<b>PAGE</b>
Table 2-1. Telephone Survey Used at Selected TMCs . . . . .	3
Table 2-2. Summary of TMCs Interviewed in the Study . . . . .	4
Table 2-3. Level of Permanent Data Aggregation at Selected TMCs in North America . . . . .	14
Table 2-4. Recommended Measures of Effectiveness for Various Objectives . . . . .	19
Table 2-5. Criteria for Goal-Achievement Evaluation . . . . .	20
Table 2-6. Classification of Criteria . . . . .	21
Table 2-7. Performance Measures for Congestion Management Systems . . . . .	24
Table 2-8. Candidate Measures of Effectiveness . . . . .	26
Table 2-9. Preferred Measures for Evaluating the Performance and Impact of Transportation Improvements . . . . .	27
Table 3-1. Example Matrix: Level of Aggregation for ITS Data Applications . . . . .	30
Table 3-2. Example of Five-Minute Point Summaries of Twenty-Second Loop Detector Data . . . . .	36
Table 3-3. Example of Fifteen-Minute Link Summaries of Loop Detector Data . . . . .	37
Table 3-4. Example of Peak Hour Corridor Summaries from Loop Detector Data . . . . .	38
Table 4-1. Approximate Storage Space and Costs for One Complete Year of TransGuide Loop Detector Data . . . . .	45
Table 4-2. Performance Measures in ITS DataLink . . . . .	47

# 1 INTRODUCTION

Many intelligent transportation system (ITS) components are being installed in U.S. urban areas, and vast amounts of data are currently available through these ITS components. Vehicle detectors (e.g., inductance loop, video, infrared, sonic, or radar) collect information about vehicle volumes, speeds, and lane occupancies. Probe vehicle systems utilize technologies such as the global positioning system (GPS) and radio/cellular phone triangulation to determine vehicle positions at frequent time intervals. Automatic vehicle identification (AVI) uses transponder polling to collect vehicle information at instrumented locations, enabling the collection of travel times and average speeds along roadway sections. This ITS data is often used only for real-time operations and then discarded. Some traffic management centers (TMCs) save the data, but few have a mechanism for sharing the data resources among other transportation groups or agencies within the same jurisdiction. Even when TMCs save data, they face issues related to transforming the vast amounts of data into useful information for adjusting operating strategies, evaluating system performance, or making decisions about future transportation investments.

## 1.1 Problem Statement

Many transportation analysts and researchers struggle to obtain accurate, reliable data about existing transportation performance and patterns. Models rely heavily on existing conditions for calibration purposes, and decision-makers rely on models and the existing transportation performance to make decisions about transportation investments. The importance of accurate, reliable data in transportation analyses is paramount to sound decisions in planning, designing, operating, and maintaining the transportation system.

An opportunity exists to utilize the vast amounts of data available through ITS for a wide variety of planning, design, operation, and evaluation purposes. The problem lies in developing a framework for retaining, managing, sharing, and analyzing the data (i.e., transforming the “mountains” of data into useful information). The information can then be used for various transportation analyses.

## 1.2 Research Objectives and Scope

The primary objective of this research is to explore several issues relating to the development of ITS data management systems. These issues include the following:

- What are the needs and potential uses of ITS data beyond real-time applications?
- What performance measures are needed for these applications, and can the available ITS data be used to calculate these performance measures?
- What computer hardware and software does an ITS data management system require?
- What are the considerations for storing and aggregating ITS data?

For the purposes of this study, ITS data include any data that are commonly collected through ITS components. ITS data typically include, but are not limited to:

- vehicle volume;
- vehicle speed;
- lane occupancy;
- vehicle classification;
- travel time; and,
- vehicle classification.

### 1.3 Organization of Report

This report contains the following chapters:

1. **Introduction** - outlines the issue of using ITS data for applications other than real-time, and summarizes the objectives of the research;
2. **Background** - provides a review of ITS data retention and management practices at selected TMCs in North America, and summarizes previous research on the selection and use of performance measures;
3. **Applications and Performance Measures Using ITS Data** - presents a matrix of the potential uses for ITS data and includes typical data requirements and formats. The chapter also recommends several performance measures and describes how ITS data can be used to calculate these measures;
4. **Development of an ITS Data Management System** - describes the approach used in developing the ITS DataLink system for warehousing, accessing, and analyzing ITS data;
5. **Findings and Conclusions** - summarizes the findings and conclusions of this past year's research; and,
6. **Recommendations** - provides recommendations for advancing the state-of-the-art in managing and using ITS data for a wide variety of transportation analyses.

## 2 BACKGROUND

This chapter provides a review of ITS data retention practices at selected traffic management centers (TMCs) and summarizes previous research on the selection and use of performance measures. Researchers surveyed selected TMCs on their retention and use of ITS data for non-real-time applications. The first part of this chapter summarizes the results of this TMC survey. The second part of the chapter presents various research on selection and use of performance measures in transportation analyses.

### 2.1 Review of ITS Data Retention and Management Practices

To better understand the current practices of retaining ITS data for future transportation analyses, the research team surveyed selected TMCs across North America. The survey questions shown in Table 2-1 were developed and administered by telephone to determine the data management strategies in existence and the opportunities that may exist for utilizing ITS data.

**Table 2-1. Telephone Survey Used at Selected TMCs**

<b>Data Management Questionnaire for Traffic Management Centers (TMCs)</b>	
1.	How large is the monitored system in centerline-miles? What data are being collected (e.g., volume, speed, occupancy, classification)?
2.	How are the data collected (e.g., loops, AVI, CCTV, other types of technology)?
3.	How often are data sent to the center or “polled” from the center? Is aggregation of the data performed at local controller units (i.e., a central or distributed system)?
4.	Are data saved for future use? If so, for what future uses are data saved?
5.	If data are saved, are they aggregated? What is the time increment over which the data are aggregated? How was this increment determined?
6.	What are the most common uses of the data? Who are the most common users of the data?
7.	What are the typical agencies (or people) making requests for the data (e.g., MPOs, universities)?
8.	Does the TMC have policies established for data storage and/or data sharing?
9.	What are the related privacy concerns that have been encountered or are anticipated with the data storage or sharing?

Table 2-2 shows the TMCs that the researchers interviewed in this study. The table provides the center name, location, web site, and contact information. Figure 2-1 shows the geographic location of the TMCs contacted for the study.

**Table 2-2. Summary of TMCs Interviewed in the Study**

<b>Location</b>	<b>Name</b>	<b>Internet Site</b>	<b>Contact Person/Phone</b>	<b>Agency</b>
Phoenix, Arizona	Traffic Operations Center	<a href="http://www.azfms.com">http://www.azfms.com</a>	Phil Carter (602) 255-7754	Arizona DOT
Los Angeles, California	Los Angeles District 7 TMC	<a href="http://www.scubed.com/caltrans/la/la_transnet.html">http://www.scubed.com/caltrans/la/la_transnet.html</a>	David Lau (213) 897-4385	Caltrans
Oakland, California	San Francisco Bay Area TMC	<a href="http://www.dot.ca.gov/dist4/links.htm">http://www.dot.ca.gov/dist4/links.htm</a>	Jack Allen (510) 286-5761	Caltrans
Atlanta, Georgia	Georgia DOT ATMS	<a href="http://www.georgia-traveler.com">http://www.georgia-traveler.com</a>	Dennis Reynolds (404) 635-1031	Georgia DOT
Oak Park, Illinois	Traffic Systems Center	<a href="http://www.ai.eecs.uic.edu/GCM/GCM.html">http://www.ai.eecs.uic.edu/GCM/GCM.html</a>	Tony Cioffi (708) 524-2145	Illinois DOT
Rockville, Maryland	Montgomery County TMC	<a href="http://www.dpwt.com">http://www.dpwt.com</a>	John Riehl (301) 217-2190	Montgomery County Dept. of Public Works and Transportation
Detroit, Michigan	Michigan ITS Center	<a href="http://campus.merit.net/mdot/its.html">http://campus.merit.net/mdot/its.html</a>	Ross Brehmer (313) 256-9800	Michigan DOT
Minneapolis, Minnesota	Minnesota TMC	<a href="http://www.dot.state.mn.us/tmc">http://www.dot.state.mn.us/tmc</a>	Ron Dahl (612) 341-7269	Minnesota DOT
Jersey City, New Jersey	TRANSCOM	<a href="http://www.travroute.com/csnj/issues/apr96transcom.html">http://www.travroute.com/csnj/issues/apr96transcom.html</a>	Sanjay Patel (201) 963-4033	TRANSCOM
Long Island, New York	INFORM	<a href="http://metrocommute.com/LI/inform.html">http://metrocommute.com/LI/inform.html</a>	Ray Schiemes (516) 952-6872	New York DOT
New York City, New York	MetroCommute	<a href="http://metrocommute.com">http://metrocommute.com</a>	Dan Broe (212) 406-9610	MetroCommute
Houston, Texas	TranStar TMC	<a href="http://traffic.tamu.edu">http://traffic.tamu.edu</a>	Carlton Allen (713) 881-3285	Texas DOT
San Antonio, Texas	TransGuide ATMS	<a href="http://www.transguide.dot.state.tx.us/overview.html">http://www.transguide.dot.state.tx.us/overview.html</a>	David Kingery (210) 731-5154	Southwest Research Institute
Seattle, Washington	North Seattle ATMS	<a href="http://www.wsdot.wa.gov/regions/northwest/nsatms/atmsmain.htm">http://www.wsdot.wa.gov/regions/northwest/nsatms/atmsmain.htm</a>	Mahrokh Arefi (206) 440-4462	Washington DOT
Toronto, Ontario, Canada	COMPASS	<a href="http://compass.gov.on.ca">http://compass.gov.on.ca</a>	David Tsui (416) 235-3538	Ontario Ministry of Transportation



**Figure 2-1. Geographic Location of TMCs Interviewed in the Study**

### *2.1.1 Phoenix Traffic Operations Center*

Phoenix was one of four cities chosen for deploying ITS technology for the Federal Highway Administration (FHWA) funded Model Deployment Initiative (MDI). Other areas that were chosen include TRANSCOM (New Jersey), San Antonio, Texas, and Seattle, Washington. Upcoming sections describe facilities in these other MDI locations. The Traffic Operations Center (TOC) in Phoenix is used for many purposes including freeway management. The system monitors 67 km (41.5 miles) of freeway and began operation in September 1995.

Inductance loops and close-caption television (CCTV) are the two primary methods used to monitor the system. Due to privacy concerns, the Phoenix TOC does not record CCTV images. Loop stations are located approximately every 0.54 km (0.33 mile) throughout the coverage area with one loop in each lane of traffic, and the loop data are archived. The loops collect volume, vehicle length, speed, and lane occupancy. This information is sent to the TOC every 20 seconds. The TOC has saved all 20-second data in a UNIX format since the opening of the Center. The TOC has also saved data in a five-minute format for each lane for one year. This five-minute summary is much easier to access according to TOC personnel. Freeway speed maps on their web site utilize fifteen-minute real-time summaries of the loop data.

The developers of the TOC in Phoenix realized that the 20-second data would inevitably be valuable information for transportation applications and research. In addition, since the Center has not been in operation long, data storage has not become a significant concern. Currently, a majority of the users of the data are DOT or TMC personnel; however, some requests have been made by universities for research purposes. Generally, operational requests desire five-minute data. Fifteen-minute summaries of the data are often desired for simple traffic counts to estimate construction impacts and for typical design work.

TOC personnel discussed several issues relating to data management considerations and uses for transportation analyses. The first consideration is that the large amounts of data are very difficult to manage with most spreadsheet and database software. In one year, the Phoenix TOC generates 15 million lines of data. This often requires that the disaggregate (e.g., 20-second) data be put into an aggregated form (e.g., 5 or 15 minutes) to perform analyses. The issue of adequate analysis tools should be considered in the planning stage of the data management system.

Another important point made was the interest in a larger system of ITS data collection, aggregation, and dissemination. The point was made that a National ITS database (e.g., similar to the Highway Performance Monitoring System, or HPMS) may be more appropriate than one that simply evaluates a single location or metropolitan area. Although local systems are clearly valuable, a National database or repository would allow for a central storage of data from several urban areas. Eventually, such a system might allow for comparisons to be made between urban areas.

### *2.1.2 Los Angeles District 7 Traffic Management Center*

The Los Angeles Traffic Management Center (TMC) has been in operation for several years and monitors 1,204 directional km (748 directional miles) of roadway. The TMC is primarily used to monitor and verify incidents in the freeway coverage area. Both inductance loops and CCTV are in operation in the monitoring system. DOT personnel use the CCTVs for verifying incidents and do not record the video for future use due to motorist privacy and liability concerns. Two television stations have a connection to the CCTVs as well. The media do not have control over the cameras; they simply have a connection to the CCTVs for simple viewing.

The TMC polls the loop stations every 30 seconds and data from these inductance loops are saved for future use. Over 1,000 loop stations placed at approximately 0.8 km (0.5 mile) spacings in each lane provide volume and lane occupancy data. The loop stations consist of single loops, and speed is estimated from the volume and lane occupancy data. The TMC saves three days of 30-second data and four days of five-minute summaries into temporary storage. The TMC has saved the 30-second data onto circular tapes since the opening of the Center. The data saved to temporary storage is much easier to retrieve than the data stored on tapes on the mainframe computer. DOT personnel developed special software that is necessary for data retrieval from the mainframe computer.



Typical users of the data include a local cable channel that provides a map of the freeways with incident information. In addition, this information is posted to the World Wide Web site. Local universities have also used the data for research purposes.

### *2.1.3 San Francisco Bay Area Traffic Management Center*

In the near future, the San Francisco Traffic Management Center (TMC) will cover all the freeways in the nine-county bay area. The TMC uses loops to obtain volume, speed, and lane occupancy data. They estimate vehicle class based upon the volume, speed and lane occupancy data. The TMC does not currently utilize CCTVs but anticipates them to be part of the future system for monitoring freeway conditions. Loop data are sent to the TMC every 30 seconds in a binary format and eventually converted to an ASCII-text format.

The TMC in San Francisco does not archive data. The San Francisco Bay Area TMC personnel recognize the importance of the data for future transportation applications. Unfortunately, the contract for the TMC development did not provide consideration for the saving of data. An effort is underway within the TMC to develop procedures for archiving and summarizing the data in a desired format. This effort is being lead by the Office of Environmental Engineering and Modeling and Forecasting. Currently, their staff is evaluating methods to aggregate the data into the five-minute level and to peak hours per lane. They wish to have the system aggregating and producing five- and fifteen-minute summaries within the next six months. The TMC personnel commented that for planning and modeling purposes, five-minute data summaries are most desirable. Requests at the TMC from researchers tend to be for much more detailed data. Other area transportation agencies, including the Metropolitan Transportation Commission (MTC), have expressed an interest in the development of an ITS data management system.

One difficulty in the development of the system appears to be the large quantity of data available for use. The size alone makes the large amount of data difficult to manage. Determining the type of aggregation level to provide is also a concern since different users appear to desire different levels of aggregation for different applications.

### *2.1.4 Georgia DOT Advanced Transportation Management System*

The Georgia DOT opened their Advanced Transportation Management System (ATMS) in May 1996. This system utilizes 360 video detection cameras to monitor 101 km (63 miles) of freeway in the Atlanta metropolitan area. The cameras obtain vehicle volume and lane occupancy data and estimate speed information. The video detection cameras are located approximately every 0.54 km (0.33 mile) in the monitored system.

Data are sent to the ATMS from the loop stations every 20 seconds and are not currently archived at the Center. DOT personnel use the data for monitoring the system and investigating incidents and accidents. The DOT has begun efforts to save the data at hourly and 15-minute

time periods. To date, most data requests have been from Georgia DOT personnel. However, DOT personnel anticipate that requests from outside individuals and agencies will increase. Therefore, they are considering methods to aggregate the data for future use and ease of access.

### *2.1.5 Illinois Traffic Systems Center*

The Traffic Systems Center (TSC) currently monitors 219 km (136 miles) of freeway and the system will be expanded in the near future to 241 km (150 miles). The system includes approximately 2,250 loops (approximately 0.8 km (0.5 mile) spacing) at to collect volume and lane occupancy data. The Center also operates three CCTV cameras for monitoring purposes. The loop data is recorded in real-time (i.e., each “pulse” is sent to the Center when a vehicle passes over a loop detector). At the Center, the individual data points are aggregated to the 20-second, one-minute, and five-minute aggregation levels.

The Center personnel store the data in five-minute binary format on nine-mm tapes, and make the data available to individuals who express interest. The tape storage and binary format makes data retrieval rather difficult. The Center personnel are seeking funding to upgrade the data storage and management process. Most requests for data are internal for local work; however, under the Freedom of Information Act, there are requests from outside the DOT for the data. The Center personnel desire a new mechanism for data management since the current system makes data retrieval difficult.

### *2.1.6 Montgomery County Transportation Management Center*

The Transportation Management Center (TMC) located in Montgomery County monitors arterial facilities only. Currently, 46 CCTVs are in operation, but future plans will utilize 200 CCTVs. In addition, the TMC includes about 1,000 loop detectors. Currently, the TMC personnel save none of the data that is used in real-time at this Center. The interrupted flow of the arterial streets being monitored by this TMC may make the loop detector data less meaningful for non-real-time applications.

### *2.1.7 Detroit, Michigan ITS Center*

The Michigan ITS Center began operation in 1981 and currently monitors 52 km (32 miles). The Center is expecting to have 225+ km (140+ miles) in the system within the next year. There are about 1,300 detector loops and 12 CCTV cameras in the field. Loops are located at approximately a 0.54 km (0.33 mile) spacing. As with all the TMCs contacted, the Michigan Center uses CCTVs to monitor and verify incidents in the field and do not save the video. The system collects average vehicle length, volume, and lane occupancy data and estimates average speeds. Double-loop detector stations located every 4.8 km (3.0 mi) along the system provide better estimates of speed. The Center personnel aggregate the data to the one-minute level for speed maps displayed on the World Wide Web. Since 1994, the Center has stored one-hour

summaries of volume data. Due to budgetary constraints, this is the only data that is being saved at the Center.

There are several users for the data including internal DOT requests (e.g., planning and operations divisions), nearby universities, and the Southeast Michigan Council of Governments (the local Metropolitan Planning Organization).

A major concern at the Michigan ITS Center is the accuracy of the loop data that are being collected. This issue is not unique to the Michigan Center as detector reliability is often questioned and maintenance is high. Algorithms have been created and implemented into the programs that create the flow maps by comparing determined or reported speeds to adjacent sections. Software that provides a reasonable estimate of “smoothed” speeds along a roadway is a useful technique to address this concern.

### *2.1.8 Minneapolis, Minnesota Traffic Management Center*

The Minnesota Traffic Management Center (TMC) monitors 282 km (175 miles) (75 percent) of the freeways in the twin cities metropolitan area. Approximately 3,000 loop detectors are in place at 0.8 km (0.5 mile) spacings. In addition, there are 180 CCTVs throughout the system at a 0.6 km (1.0 mi) spacing. TMC personnel use the CCTVs to monitor incidents and verify algorithms. The loop detectors collect average volume per lane across lanes at a given location, occupancy (presence), and vehicle length. Average speed is estimated from this data. Center personnel note that this estimated speed is an adequate estimate for most uses, including speed maps on the World Wide Web.

Loop stations are polled from the Center every 30 seconds as an average across lanes. Every five minutes, the data are aggregated and saved. The TMC software compress the five-minute data from 2.3 MB to 1.5 MB and save it on the hard disk every day. The process is automatic and the data have been saved since the Center opened in 1993. In addition, the 30-second mainlane loop data are also archived and logged. A seven-day “wrap around” file is kept in readily accessible computer disk storage for easy access. The decision to save the data at the 30-second level was made since the space was available and the lowest level of disaggregation seemed necessary for the requests of the data being made. In addition, summaries of 5 minutes, 15 minutes, or other time periods can easily be obtained from the 30 second data. Most requests are from the DOT for traffic analysis, construction impact determination, and planning applications. Researchers from local universities often request the data as well. Due to many data requests from agencies and individuals external to the Center, a data distribution service (DDS) has been developed. This service allows interested individuals and agencies to receive the 30-second data stream through the Internet.

### 2.1.9 *TRANSCOM*

TRANSCOM (the Transportation Operations Coordinating Committee) opened in 1986 to coordinate traffic management in New York, New Jersey, and Connecticut. TRANSCOM was one of four TMCs in the United States to be selected for funding for the Model Deployment Initiative. Several agencies in the tri-state area supply traffic management information to TRANSCOM.

A project of particular interest is TRANSCOM's System for Managing Incidents and Traffic (TRANSMIT). The TRANSMIT system is using vehicles with automatic vehicle identification (AVI) transponders installed on the vehicles. These "E-Z Pass" tags are used for toll collection and also allow for using the vehicles as probes of the traffic flow. The TRANSMIT system collects speed and travel time data for use in incident detection. The TRANSCOM system also uses CCTVs for verification of the AVI system and incident management, but does not save CCTV video. The tag "reads" come into the Center in real-time as they occur in the field. The TMC software aggregates and saves this information into 15-minute time periods. The system does not save real-time tag reads for each vehicle. Furthermore, privacy concerns are eliminated since readings of the tag account numbers are not saved by the system. A tag number is read; however, it is a dummy tag number that cannot be used to trace individual vehicles. The system has been in operation for six months and TRANSCOM operators are pleased with its performance. TRANSCOM personnel claim that the system costs much less than loop installation and maintenance, especially since lane closure is not necessary for routine repairs and maintenance. Requests for the AVI data have been for origin-destination surveys and planning for construction.

The AVI data is the only data that TRANSCOM saves. Centers throughout the tri-state area simply send information regarding incidents to TRANSCOM but not the raw data that is used in their algorithms. TRANSCOM personnel save text files which describe the incidents that have occurred and been managed by the Center.

### 2.1.10 *INFORM*

INFORM (INformation FOR Motorists) monitors 56 km (35 miles) of the central corridor of the Long Island Expressway (Route 495). The Center polls the 2,400 loop detectors 60 times per second. The data are then aggregated to 1/4 second, one minute, and 15 minutes at the Center. The loops are located at 0.8 km (0.5 mile) spacings, one per lane, and collect volume, lane occupancy, and vehicle length data. Vehicle speeds are estimated from this data. The 15-minute data are saved every day in a compressed ASCII text file in a 15-minute format. These data are archived for a three month period and then the tapes are overwritten.

The data management system was developed due to budget and space constraints. Typical data requests are internal and are from planning, operations, and design groups. Of particular interest is the fact that the planning department would like the data in a five minute

format to be consistent with the data produced by their count stations, which are separate from those feeding the INFORM system. Requests for data are also on the increase from researchers for algorithm development and accident prediction models.

#### *2.1.11 MetroCommute*

MetroCommute is a private company in New York that provides traveler information to New York commuters and travelers. They obtain their data through a link to the INFORM system. MetroCommute adds incident and construction information to the INFORM data. Detours are also provided to commuters. MetroCommute has archived their data in one-minute intervals since June 1996. MetroCommute personnel are analyzing the data as well and searching for daily trends in travel times. In addition, analytical tools and models for correlating accidents and evaluating incidents are being studied. MetroCommute personnel stress the importance of research to evaluate and analyze the information being brought into the Center since it is too large a task for private industry to adequately evaluate. MetroCommute provides a good example of a private company that is utilizing a feed to real-time travel information for enhanced traveler information for motorists.

#### *2.1.12 TranStar Traffic Management Center*

The Houston TranStar Traffic Management Center (TMC) provides traffic management for 257 km (160 miles) of the Houston freeway system. By 1998, TranStar expect to cover 370 km (230 miles). Currently, loop detectors spaced at 0.8 km (0.5 mile) provide real-time indications of traffic flow by providing volume, lane occupancy, and speed data. CCTVs are also used for surveillance, but the video is not recorded. Loop data, which cover approximately 48 km (30 miles), are sent to the Center every 20 seconds, but are not archived.

Houston also has an extensive AVI system in operation. Approximately 175,000 tags are in circulation in the metropolitan area, and reads on the tags are sent to the Center in real-time as they occur. AVI data are stored in 15-minute summaries for future use. Currently, the Houston TranStar system utilizes the ITS data that are available for real-time applications including freeway management and operations. The AVI data are also used to update the speed map on the World Wide Web site. In addition, AVI data have been used for research applications including quantifying the benefits of HOV lanes and ramp metering in Houston.

#### *2.1.13 TransGuide Advanced Traffic Management System*

The City of San Antonio is another of the four cities selected for the national deployment of the intelligent transportation infrastructure (ITI). The TransGuide Advanced Traffic Management System (ATMS) currently covers 42 km (26 miles) of freeways with loop detectors placed at 0.8 km (1/2 mile) spacings. This year, the system will be expanding to 85 km (53 miles). The loop detector stations collect volume, lane occupancy, and speed data. In addition, an AVI system is planned for San Antonio and will cover 157 km (97.5 miles) on different

facilities than the 85 km (53 miles) with loop detectors. The AVI system will produce vehicle travel time and average speeds. The AVI tag reads will be scrambled so that the reads cannot be traced to an individual driver.

TransGuide computer servers poll the loop stations every 20 seconds. The TMC save this data in disaggregate form and make it available on their Internet site. Providing data via the Internet site reduces the time spent finding data that is requested. The TMC also stores the loop data in 15-minute summaries on their Internet site. Users of the data that TransGuide collects have included researchers and requests internal to the Department. Research requests for the data have been for incident detection algorithm development. Additional research at the Texas Transportation Institute (TTI) is developing an ITS data management system using the TransGuide loop detector data (described in this report). The system will allow the user to click on the roadway facilities, time of day, level of aggregation, and performance measures (e.g., travel time, average speed). The system will then query a database to obtain summary reports of the information requested by the user. In addition, users access the ITS data management system through a web site for use by individuals in different areas.

#### *2.1.14 North Seattle Advanced Traffic Management System (ATMS)*

Seattle is the forth city selected for the MDI. The North Seattle ATMS monitors approximately 161 km (100 miles) of freeway system in the Seattle area. Loop detectors placed at 0.8 km (0.5 mile) spacings collect volume, lane occupancy, and speed data. The data from these detectors are sent to the Center every 20 seconds automatically. The TMC also operates CCTVs but uses them for monitoring purposes only. They do not record any video.

The North Seattle ATMS stores loop detector data at the five-minute aggregation level. Six months are saved on a CD, and data exists in this form for the last five years. Data were also saved in the early 1980s, but it is not in CD form. Requests for the data are from other agencies, consultants, media for five or ten year trends, universities, and from within the Department. Data are provided to those who request it under the Freedom of Information Act. The North Seattle ATMS personnel pointed out the large amount of public support that the traffic information on the World Wide Web generates. The public appreciates the information, which aids in making the initiative a success.

#### *2.1.15 Toronto's COMPASS*

COMPASS is a traffic management system that monitors portions of Highway 401 in Toronto, Canada. Loop detectors are located in 35 km (22 miles) of the roadway and 56 CCTVs are located along 45 km (28 miles) of the roadway. There are approximately 400 detector stations spaced from 600 to 800 meters apart. This includes about 1,700 loops. The loops provide volume, occupancy (presence), average speed, and average vehicle length data to the Center as they are polled every 20 seconds. The 20-second data comes into the Center and is aggregated in the five-minute, 15-minute, one hour, daily, and monthly time periods.

The TMC archives all data for 20-second and five-minute time increments. For data summaries of 15 minutes or more, only volume data are saved. Data are archived on 8 mm data cartridges. In addition, the COMPASS computer systems can hold 2 days of 20-second loop data, 30 days of five-minute and 15-minute data, and about 200 days of hourly data. The five-minute time increment was selected because it appeared to provide a convenient time increment that many users could utilize. Common users and uses of the data include researchers desiring 20-second data for simulation and algorithms, Internet flow maps, real-time incident detection COMPASS algorithm, and in-house requests. In-house requests account for about 60 percent of data requests (traffic forecasts, roadway impact analyses).

### 2.1.16 Summary of Findings

Table 2-3 summarizes the level of permanent data aggregation and storage at the TMCs that were interviewed in this study. Three of the 15 TMCs interviewed are not currently storing any of the ITS data that are collected. Furthermore, there does not appear to be a consistent aggregation level or levels among the TMCs that are saving data. Most TMCs save data at time periods ranging from less than one minute to 15 minutes. Based upon the interviews conducted, this does not appear to be the result of different uses and users of the data at the different TMCs. The interviews revealed that the requests for data were consistent among the TMCs. Users and uses for all the TMCs include requests within the DOT, research requests, and private firm requests. Internal requests include traffic management and monitoring, planning applications such as demand estimation and forecasting, and construction impact analyses (e.g., lane closures). Research requests are for uses such as simulation and model or algorithm development (e.g., accident prediction, incident detection algorithms).

**Table 2-3. Level of Permanent Data Aggregation at Selected TMCs in North America**

TMC	< 1 min.	1 min.	5 min.	15 min.	Data Not Stored
Phoenix TOC	✓		✓	✓	
Los Angeles (Caltrans District 7)	✓				
San Francisco Bay Area					✓
Georgia DOT, Atlanta					✓
Illinois Traffic Systems Center			✓		
Montgomery County (MD)					✓
Michigan ITS Center, Detroit		✓			
Minnesota TMC, Minneapolis	✓		✓		
TRANSCOM				✓	
INFORM	✓	✓		✓	
MetroCommute		✓			
TranStar				✓	
TransGuide	✓			✓	
North Seattle ATMS			✓		
COMPASS, Toronto	✓		✓		

Note: Stored data for the TMCs indicated in this table are from inductance loop detectors except TRANSCOM (AVI) and TranStar (AVI).



## 2.2 Summary of Data Retention and Management Practices

The results of this survey provide valuable insight into data management and archiving issues, concerns, and experiences from some of the more advanced TMCs in North America. The following conclusions can be drawn:

- **Planning for Data Retention and Management** - A common theme throughout the surveys is that adequate consideration be given to the data management and analysis capabilities in the TMC. This includes ensuring prior planning for data needs and storage space. Consideration should also be given to ensuring that the system operates efficiently. This will reduce the cost of obtaining data for requests. A full-time data management staff and/or an individual who is responsible for the data management and archiving is also an important element to evaluate when developing the system.
- **Identify Appropriate Levels of Detail** - Many TMCs recognized early in their development the importance and value of obtaining and archiving detailed data from field detectors (i.e., at every 20 or 30 seconds). However, many of these TMCs still struggle with identifying what aggregation levels are necessary for different applications. Table 2-3 provides some insight into this based upon the experiences of the TMCs surveyed.
- **Storage Capacity and Management** - ITS data potentially requires large amounts of data storage capacity. With modern computing technology this can be supplied at a moderate cost; however, the data can become difficult to manage without an efficient data management strategy. With data in a disaggregate form (e.g., 20 second), this consideration becomes more critical.
- **Regional Data Repository** - There is often a desire by transportation agencies (e.g., Metropolitan Planning Organizations) for ITS data in a given region. A regional data repository could allow data management to occur at a central location on a regional level. The TRANSCOM system in New Jersey provides an example of the first step in the development of such a system that covers a tri-state area.
- **Relation to ITS National Architecture** - Another issue that arose was the relationship between these ITS data management systems and the ITS National Architecture. The Architecture does include some provisions for the storage and management of data in planning subsystems. However, TMCs need additional guidance with these “planning subsystems” and related data dictionaries.

- **Use of CCTV** - TMCs generally use CCTVs only for incident monitoring and system verification in real-time. The images produced from the cameras are rarely, if ever, recorded due to liability and privacy concerns.
- **Public and Professional Support** - Public and professional support of data retention and management is important. Fundamentally, TMCs are established for ensuring the efficient and safe mobility of a community. The benefits of TMCs must be apparent to the general public. The public has generally looked very favorably upon the traveler information that is provided via the Internet from the data coming into the TMCs.

Further, professional support is also important. There are many benefits to having data from TMCs available for future transportation analyses. Benefits can be shown in many transportation applications. For example, planning and operations professionals can obtain valuable information from the data entering TMCs. In addition, decision-makers can receive assistance with the increased data for benefit/cost estimates and analyses. To ensure that data are provided for these purposes, cross-disciplinary coordination and communication is essential (e.g., ITS operations personnel communicating with planning personnel).

Many of the issues summarized above are common to several of the TMCs currently in operation. There is a strong desire for systems that can manage the large amounts of data in a manner that permits easy access to the data at different aggregation levels.

The remainder of this chapter provides background information on the selection and application of performance measures. There is an opportunity to use the ITS data being saved in the TMCs for the calculation of a number of performance measures.

### **2.3 Performance Measures Based Upon Goals and Objectives**

The first step in transportation analyses, even before selecting performance measures, is to define goals and objectives of the transportation plan or improvement (Figure 2-2). These goals and objectives clearly define the desired outcome of the plan or improvement. Once the desired outcome has been specified, then the appropriate performance measures can be selected. Examples of goals and objectives statements that are rather broad include:

- “To reduce congestion and increase economic productivity . . .”
- “To provide a high quality of transportation service . . .”
- “To provide accessibility to jobs, retail shopping, and public services . . .”

Goals and objectives may also be more focused for particular types of analyses or programs, such as:

- “To minimize the noise impacts along the transportation corridor . . .”
- “To increase the safety of commuters . . .”
- “To increase the operating efficiency . . .”

### **2.4 Previous Research on Transportation Performance Measures**

The literature contains several examples of selecting performance measures based upon specified goals and objectives. Abrams and DiRenzo (1) developed a list of measures of effectiveness for comparing multimodal transportation alternatives, which is shown in Table 2-4. The table illustrates that a number of different measures can be used for different goals and objectives.

Stuart and Weber (2) suggested the use of a goal-achievement methodology for comparing a large number of multimodal alternatives. In other words, alternatives are contrasted to one another by comparison of how well each achieves a defined goal for the transportation improvement. Table 2-5 lists goals, objectives, and evaluation measures from a case study examining the Los Angeles/San Diego intercity corridor.

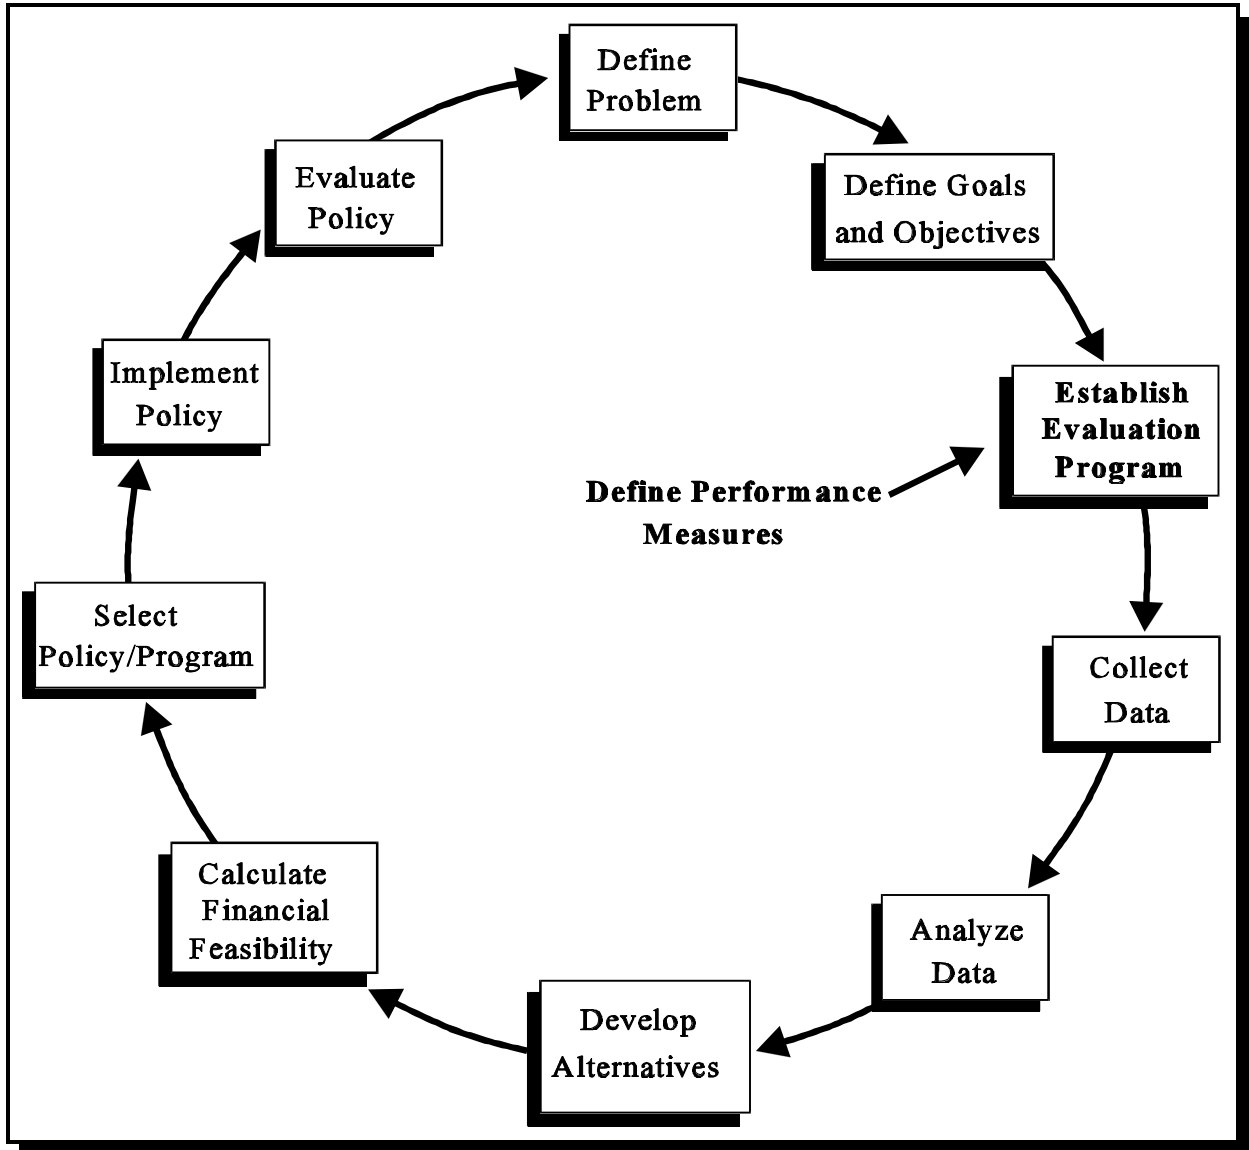


Figure 2-2. Performance-Based Planning Process (Adapted from Reference 3)

**Table 2-4. Recommended Measures of Effectiveness for Various Objectives (Adapted from Reference 1)**

<p><b>Objective: Minimize Travel Time</b>            Person-Hours of Travel            Point-to-Point Travel Time            Response Time for Dial-a-Ride Transit            Vehicle Delay            Vehicle-Hours of Travel            Vehicle Stops</p> <p><b>Objective: Minimize Travel Costs</b>            Parking Cost            Point-to-Point Out-of-Pocket Travel Costs            Point-to-Point Transit Fares</p> <p><b>Objective: Maximize Safety</b>            Accidents            Accident Rate            Freeway Incident Rate            Traffic Violations</p> <p><b>Objective: Maximize Security</b>            Crimes</p> <p><b>Objective: Maximize Comfort and Convenience</b>            Active Revenue Vehicles with Working A/C &amp; Heat            Frequency of Transit Service            Hours of Transit Operations            Parking Accumulation            Comfort &amp; Convenience            Transfers per Transit Passenger            Transit Load Factor            Transit Transfer Time            Trip Distance            Walking Distance from Parking Location to Dest.</p> <p><b>Objective: Maximize Reliability</b>            Freeway Incident Delay            Perceived Reliability of Service            Schedule Adherence            Variance of Average Point-to-Point Travel Time</p> <p><b>Objective: Minimize Auto Usage</b>            Intersection Vehicle Turning Movements            Number of Car Pools            Number of Vehicles by Occupancy            Person-Km (Mi) of Travel            Person Trips            Traffic Volume            Vehicle-Km (Mi) of Travel</p> <p><b>Objective: Maximize Transit Usage</b>            Information Requests            Passenger-Km (Mi) of Travel            Transit Passenger</p>	<p><b>Objective: Maximize Pedestrian and Bicycle Travel</b>            Bicycle Counts            Pedestrian Counts</p> <p><b>Objective: Maximize Capacity</b>            Critical Lane Volume            Level of Service            Parking Supply            Volume/Capacity Ratio</p> <p><b>Objective: Maximize Productivity</b>            Active Revenue Vehicles            Inspection &amp; Maintenance Cost per Labor Hour            Length of Queue            Operating Cost per Passenger Trip            Operating Cost per Revenue Vehicle-Km (Mi)            Operating Revenue/Operating Costs            Passengers per Revenue Vehicle-Hour            Passengers per Revenue Vehicle-Km (Mi)            Revenue Vehicle-Km (Mi) per Active Revenue Vehicle</p> <p><b>Objective: Minimize Operating Costs</b>            Operating and Maintenance Costs            Operating Deficits            Operating Revenue</p> <p><b>Objective: Minimize Capital Costs</b>            Capital Costs</p> <p><b>Objective: Minimize Noise Impacts</b>            Noise Levels</p> <p><b>Objective: Minimize Air Pollution</b>            Concentration of Pollutants            Tons of Emissions</p> <p><b>Objective: Minimize Energy Consumption</b>            Energy Consumption</p> <p><b>Objective: Maximize Transportation Disadvantaged Ridership</b>            Transportation Disadvantaged Ridership</p> <p><b>Objective: Minimize Economic Impacts</b>            Dollar Sales            Employment</p> <p><b>Objective: Maximize Equity</b>            Point-to-Point Travel Costs to Major Activity Centers            Point-to-Point Travel Time to Major Activity Centers            Population within 0.4 km (0.25 mi) of Bus Route</p> <p><b>Objective: Minimize Displacement</b>            Acres of Land Acquired            Structures Displaced</p>
--	--

**Table 2-5. Criteria for Goal-Achievement Evaluation (Adapted from Reference 2)**

Goal	Objective	Evaluation Measure
<b>Improve multimodal balance</b>	Ridership levels	Number of weekday person trips Weekday mode-split percentage
	Revenue-cost viability	Annual revenue to operating cost ratio
	Investment efficiency	Annual operating cost per passenger-km Annual capital cost per passenger-km
	Implementation feasibility	Future revenue to operating cost ratio Future revenue to total cost ratio
	Geographic balance	Modal improvement costs by county
	Modal coordination	Number of multimodal terminals Judgmental rating if improvement staging
<b>Effectively meet interregional travel demands</b>	Multimodal rights-of-way	Bimodal route distance Trimodal route distance
	Collection-distribution interfaces	Judgmental rating by mode
	Capacity-demand balance	Volume-capacity ratios on peak links (public modes)
<b>Minimize undesired social, economic, and environmental impacts</b>	Coastal environment	Judgmental rating by mode
	Open space resources	Designated open space and parks consumed
	Ecological and historical resources	Number of intrusions on historical or archaeological sites
	Agricultural resources	Agricultural land consumed Vacant land consumed
	Transportation noise	Noise level at 15 m Maximum frequency of service

Rutherford (4) reviews several multimodal evaluation projects undertaken in the United States and Canada prior to 1992 in a National Cooperative Highway Research Program (NCHRP) Synthesis of Highway Practice on Multimodal Evaluation in Passenger Transportation. Rutherford concluded that “. . . new training, assistance, and guidelines for multimodal evaluation should be provided at the national level.” Also, Rutherford concluded that the lack of commonly accepted multimodal measures of mobility hinders effective multimodal evaluation. The synthesis did identify criteria categories for multimodal comparisons (Table 2-6).

**Table 2-6. Classification of Criteria (Adapted from Reference 4)**

General Category of Goals/Objectives	Typical Criteria	
1. Transportation System Performance	Number of trips by mode Vehicle-km (mi) traveled Highway level of service	Peak hour congestion Transit boardings Congestion
2. Mobility	Improved movement of people	Mobility options
3. Accessibility	% within 30 minutes, etc. Transit and highway speeds	
4. System Development, Coordination and Integration	Projects in existing plans Transportation system development	Terminal transitions Regional importance
5. Land Use	Compatibility with land use plans	Growth inducement
6. Freight	Reduced goods movement costs	
7. Socioeconomic	Homes or businesses displaced Maximize economics benefit Construction employment	Historic impacts
8. Environmental	Air quality Natural environment	Sensitive areas
9. Energy	Energy Consumption	
10. Safety	Annual accidents by mode	Safety ratings
11. Equity	Equity of benefit and burden	
12. Costs	Capital costs	Operating costs
13. Cost Effectiveness	Annualized costs per trip or mile	FTA index
14. Financial Arrangements	Funding feasibility - Build/operate Public/private sources	Funds required
15. Institutional Factors	Ease of staging and expansion Non-implementation agency support	
16. Other	Right-of-way opportunities Enforcement	Fatal flaw Recreation

Cambridge Systematics (5) presents performance measures for the National Transportation System that are based upon the following broad objectives:

- **Economy:** effects of transportation on the level of economic growth and productivity, employment, and profitability of American business at home and abroad;
- **Social Well-Being:** impacts of transportation on access to opportunity, mobility, and quality of life, particularly in consideration of disadvantaged market segments;
- **National Security:** maximum capability to mobilize armed forces or police to intervene in international or domestic disturbances which threaten the general welfare; maximum capability to respond to public safety in times of national emergency or natural disasters;
- **Safety:** impact of transportation actions on the safety of the traveling public, in transport of goods, or in relation to those persons/activities affected by transportation accidents;
- **Environment:** impact of transportation programs, actions, or use on levels of air pollution, noise, or toxic spills; and,
- **Natural Resources:** transportation's drain on non-renewable resources such as energy, parklands, and nature habitats.

Cambridge Systematics then develops performance measures that fall within the following topology:

#### **I. Transportation System Performance Measures**

- **Effectiveness:** measures of access and quality of service, primarily from a user perspective;
- **Efficiency:** measures of the cost-effectiveness and utilization efficiency of the transportation system, primarily from the perspective of suppliers and society; and,
- **Descriptors:** key statistics on extent and condition of the transportation system, and levels of usage.



## II. Societal Impact Performance Measures

- **Types of Societal Goal/Concern:**
  - Economic activity, productivity
  - Social well-being, freedom of choice, equity
  - Safety and security
  - Environmental impact and preservation
  - Consumption of energy and non-renewable resources
- **Effectiveness:** degree to which the goal/concern is increased or decreased as a result of transportation initiatives; and,
- **Efficiency:** direct cost to provide the transportation initiative, and the societal efficiency or “tradeoff” in relation to changes in the condition of other social goals.

The study contains numerous performance measures that fit into this evaluation framework, both for passenger and freight transportation systems.

Related research presents performance measures for various categories or specific impacts and applications. A study performed by Cambridge Systematics (6) for FHWA examined the performance measure needs for congestion management systems. Cambridge Systematics found a wide range of measures in their review of the practice for corridor analyses (Table 2-7).

**Table 2-7. Performance Measures for Congestion Management Systems  
(Adapted from Reference 6)**

Measure Category	Performance Measure
Time-Related	average travel speed average travel time average travel rate travel time contours origin-destination travel time percent travel time under delay conditions percent of time average speed below "X"
Volume	VMT/lane-km (mi) traffic volume
Congestion Indices	congestion index roadway congestion index TTI's suggested congestion index excess delay
Delay	delay per trip delay per vehicle-km (mi) of travel minute-km (mi) of delay delay due to construction/incidents
Level-of-Service	lane-km (mi) at/of LOS "X" VHT/VMT at/of LOS "X" predominant intersection LOS number of congested intersections
Vehicle Occupancy/Ridership	average vehicle ridership vehicle occupancy

NCHRP Project 7-13, *Quantifying Congestion*, found that travel time-based measures were most appropriate for measuring congestion, and that travel time-based congestion measures were applicable for a wide range of single-mode and multimodal analyses (7,8). The report listed the following measures as applicable for multimodal corridor analyses:

- average travel rate;
- delay rate;
- total delay;
- relative delay rate;
- delay ratio;
- person-speed; and,
- corridor mobility index.

Meyer (9) presents a similar case for travel time-based measures in a performance-based planning process. In his study, Meyer concludes that mobility and accessibility should be important measures of system performance, and that travel time and related measures and availability of alternative modes should be the foundation of mobility measures. Ewing (10) also suggests transportation performance measures such as VMT/VHT, emissions per hour, accessibility (based upon travel time), average vehicle occupancy, average speed for areawide analyses, and average walk-bike share of modal travel.

Turner, Best, and Schrank (11) designate five categories of performance measures for use in major investment studies:

- Transportation system performance;
- Financial/economic performance;
- Social impacts;
- Land use/economic development impacts; and,
- Environmental impacts.

The report developed a list of candidate performance measures (Table 2-8), which were quantitatively evaluated for use in major investment studies. Turner et al. selected a preferred set of measures based upon the quantitative evaluation (Table 2-9).

**Table 2-8. Candidate Measures of Effectiveness (Adapted from Reference 11)**

<b>Transportation Performance</b>	<b>Financial/Economic Performance</b>	<b>Social Impacts</b>	<b>Land Use/Economic Development Impacts</b>	<b>Environmental Impacts</b>
<ul style="list-style-type: none"> <li>• average travel time</li> <li>• total delay</li> <li>• average travel rate</li> <li>• person-km (mi) of travel in congestion ranges</li> <li>• person movement</li> <li>• person-hours of travel in congestion ranges</li> <li>• person movement speed</li> <li>• accident reduction</li> <li>• average speed</li> <li>• corridor mobility index</li> <li>• average vehicle occupancy</li> <li>• mode split</li> <li>• intermodal or system connectivity/continuity</li> <li>• average delay rate</li> <li>• enforceability</li> <li>• vehicle-km (mi) of travel in congestion ranges</li> <li>• hours of congestion</li> <li>• relative delay rate</li> <li>• delay ratio</li> <li>• average daily traffic</li> <li>• trip time reliability</li> <li>• level of service</li> <li>• lane-km(mi)-hours of congestion</li> <li>• volume-to-capacity ratio</li> <li>• queue length</li> </ul>	<ul style="list-style-type: none"> <li>• benefit-to-cost ratio (cost-effectiveness)</li> <li>• financial feasibility</li> <li>• cost per new person-trip</li> <li>• total or “full” costs</li> <li>• user benefits</li> <li>• equity</li> <li>• staged improvement feasibility</li> </ul>	<ul style="list-style-type: none"> <li>• number of displaced persons</li> <li>• number and value of displaced homes</li> <li>• accessibility to community services (e.g., hospital, school, fire, police)</li> <li>• neighborhood cohesion (increased traffic on local streets)</li> <li>• neighborhood quality</li> <li>• construction traffic and disruption</li> <li>• public lands/facilities</li> <li>• recreation benefits</li> </ul>	<ul style="list-style-type: none"> <li>• number and value of displaced businesses</li> <li>• accessibility to employment</li> <li>• accessibility to retail shopping</li> <li>• accessibility to new/planned development sites</li> <li>• tourism benefits</li> </ul>	<ul style="list-style-type: none"> <li>• noise levels (dB)</li> <li>• mobile source emissions/air quality</li> <li>• energy consumption</li> <li>• visual quality/aesthetics</li> <li>• water resources</li> <li>• wetlands/flood plain</li> <li>• wildlife/vegetative habitat</li> <li>• parklands/open/green space</li> <li>• agriculture/forest resources</li> <li>• cultural (historic, archaeological) resources</li> <li>• geological resources</li> <li>• hazardous wastes</li> <li>• vibration</li> </ul>

**Table 2-9. Preferred Measures for Evaluating the Performance and Impact of Transportation Improvements (Adapted from Reference 11)**

<p><b>Transportation Performance</b></p> <ul style="list-style-type: none"> <li>• average travel time</li> <li>• total delay (vehicle, person or ton-hours)</li> <li>• average travel rate</li> <li>• person-km (mi) of travel (PMT), or PMT in congested ranges</li> <li>• person movement</li> <li>• person-hours of travel (PHT), or PHT in congested ranges</li> <li>• person movement speed</li> <li>• accident reduction</li> </ul>
<p><b>Financial/Economic Performance</b></p> <ul style="list-style-type: none"> <li>• benefit-to-cost ratio (using total or full cost analysis)</li> <li>• financial feasibility</li> <li>• cost per new person-trip</li> </ul>
<p><b>Social Impacts</b></p> <ul style="list-style-type: none"> <li>• number of displaced persons</li> <li>• number and value of displaced homes</li> <li>• accessibility to community services</li> <li>• neighborhood cohesion</li> </ul>
<p><b>Land Use/Economic Development Impacts</b></p> <ul style="list-style-type: none"> <li>• number and value of displaced businesses</li> <li>• accessibility to employment</li> <li>• accessibility to retail shopping</li> <li>• accessibility to new/planned development sites</li> </ul>
<p><b>Environmental Impacts</b></p> <ul style="list-style-type: none"> <li>• noise levels (dB)</li> <li>• mobile source emissions (NO<sub>x</sub>, HC, CO, and PM-10)</li> <li>• energy consumption</li> <li>• visual quality/aesthetics</li> <li>• water resources (Option II MIS only)</li> <li>• wildlife/vegetative habitat (Option II MIS only)</li> <li>• parkland/open/green space (Option II MIS only)</li> <li>• agriculture/forest resources (Option II MIS only)</li> <li>• cultural resources (Option II MIS only)</li> <li>• geologic resources (Option II MIS only)</li> <li>• hazardous wastes (Option II MIS only)</li> <li>• vibration (Option II MIS only)</li> </ul>

## 2.5 Summary of Performance Measure Research

The previous sections included substantial information on the definition and selection of transportation performance measures. The researchers identified several key points from the literature review:

- Performance measures should be based upon goals and objectives for transportation plans or improvements.
- Many performance measures in the literature were based upon two basic quantities irrespective of transportation mode: travel time and person movement.
- To adequately capture all desirable goals of a transportation system, performance measures should characterize more than just traditional notions of mobility or efficiency. Safety, accessibility, and equity are non-traditional measures that should be considered in selection of performance measures.

### 3 APPLICATIONS AND PERFORMANCE MEASURES USING ITS DATA

This chapter contains a discussion of the needs and potential uses for ITS data in transportation analyses and decision-making processes. Specific applications are summarized in regard to the level of detail and data format. The chapter emphasizes the importance of identifying the needs and potential uses of the data, and then adapting the data management processes. The chapter also presents numerous performance measures that can be calculated from ITS data. The chapter also provides examples to illustrate the calculation of these performance measures from ITS data obtained from the TransGuide TMC in San Antonio, Texas.

#### 3.1 Identifying Needs and Potential Uses for ITS Data

Data collected by ITS components are based upon the needs and specific functions of the given system component. For example, inductance loops and other point detection devices are designed to provide information about traffic conditions on a frequent basis. As such, inductance loops and other point detection devices typically report lane-by-lane volumes, occupancies, and speeds every 20 to 30 seconds. Transportation professionals use this detailed information about traffic conditions in real-time for a variety of applications that include, but are not limited to:

- Verification of and response to incidents;
- Operation of ramp metering strategies;
- Operation of changeable message and lane assignment signs;
- Operation of traffic-adaptive signal control strategies; and,
- Provision of traffic condition information to travelers.

Each specific application of ITS data has certain requirements in terms of level of detail and format. For the previous example, the real-time operational applications require detailed information (e.g., typically lane-by-lane detectors every 0.8 km or 0.5 mile) that is updated on a frequent basis (e.g., every 20 to 30 seconds). Secondary uses or applications of ITS data related to transportation planning, programming, or evaluation typically require less detailed information (e.g., corridor or system) for extended periods of time (e.g., monthly or annual averages). **Thus it is important to consider the needs and potential uses of ITS data prior to developing an ITS data management system, as they control the level of detail for data storage.**

Table 3-1 provides a perspective on the various potential applications of ITS data and the desirable level of detail for each application. The table illustrates the following important points:

- Different uses of ITS data require different levels of detail;
- Design and operational applications commonly require detailed data for shorter sections and roadway and small intervals of time;
- Planning applications commonly require historical data over extended sections of roadway and periods of time; and,
- Evaluations require a range of detail levels for both time and space.

**Table 3-1. Example Matrix: Level of Aggregation for ITS Data Applications**

ITS Data Applications	Level of Aggregation								
	Time					Space			
	No Aggregation (Ind. Veh.)	Less than 5 minutes	5 to 15 minutes	Hourly or Multi-Hour	Daily	Point (by Lane or Screenline)	Segment	Corridor	Sub-area or Region
<b>Design and Operations</b>									
Design future ITS components		D,W,M	D,W,M						
Develop historical travel time database			D,W	D,W					
Input/calibration for traffic models (traffic, emissions, fuel consumption)	D,W	D,W	D,W						
Real-time freeway and arterial street traffic control	D,W	D,W	D,W						
Route guidance and navigation	D,W	D,W	D,W						
Traveler information	D	D							
Incident detection	D	D							
Congestion pricing			D,W	D,W					
<b>Planning</b>									
Develop transportation policies and programs				M,Y	M,Y				
Perform needs studies/assessments				M,Y	M,Y				
Rank and prioritize transportation improvement projects for funding				M,Y	M,Y				
Evaluate project-specific transportation improvement strategies				M,Y	M,Y				
Input/calibration for mobile source emission models	D			M,Y	M,Y				



**Table 3-1. Example Matrix: Level of Aggregation for ITS Data Applications (Continued)**

ITS Data Applications	Level of Aggregation								
	Time					Space			
	No Aggregation (Ind. Veh.)	Less than 5 minutes	5 to 15 minutes	Hourly or Multi-Hour	Daily	Point (by Lane or Screenline)	Segment	Corridor	Sub-area or Region
Input/calibration for travel demand forecasting models				M,Y	M,Y				
Calculate road user costs for economic analyses				M,Y	M,Y				
<b>Evaluation</b>									
Congestion management system/performance measurement				M,Y	M,Y				
Establish and monitor congestion trends (extent, intensity, duration, reliability)			M,Y	M,Y	M,Y				
Identify congested locations and bottlenecks			D,M,Y	D,M,Y					
Measure effectiveness and benefits of improvements (before-and-after studies)			M,Y	M,Y					
Communicate information about transportation problems and solutions				M,Y	M,Y				
Input/calibration for traffic models (traffic, emissions, fuel consumption)	D,W	D,W	D,W	D,W					

Notes: Shaded cells of the table represent applicable aggregation levels.  
D = Daily; W = Weekly; M = Monthly; Y = Yearly (Annual).

### 3.2 Estimating Performance Measures from ITS Data

Chapter 2 contained many measures that quantified different performance aspects or impacts of transportation. The primary performance aspects of transportation that can be derived from ITS data are related to **efficiency** and **quality of service**. Thus, ITS data can be used to calculate various transportation performance measures related to efficiency and quality of service. The use of ITS data for these two performance aspects does not imply that these are the only performance measures that should be considered in transportation policies, plans, and programs. In fact, many other performance measures are critical to fully understanding the impacts of transportation on users and society as a whole. It is with regard to these two performance aspects (efficiency and quality of service) that ITS data can contribute to a comprehensive performance-based planning process.

Performance measures related to the efficiency and quality of service that can be calculated or estimated using readily available ITS data include:

**Point Measures** - associated with a particular point on the transportation system.

- spot speed (kilometers per hour); and,
- person volume or throughput (persons per hour).

**Link-Based Measures** - associated with a small sub-portion of a person trip or transportation facility.


- travel time (seconds or minutes);
- average speed (kilometers per hour);
- person volume or throughput (persons per hour);
- person-movement speed (person-kilometers per hour); and,
- person delay (person-hours).

**Corridor or System Measures** - associated with a large sub-portion of a person trip or transportation facility.

- average person speed (person-kilometers per hour);
- total person delay (person-hours);
- person-km (mi) of travel in congestion (total and percent);
- person-hours of travel in congestion (total and percent);
- corridor mobility index; and,
- roadway congestion index.

The research team identified these measures from Chapter 2 (which summarized performance measures research), which are primarily based upon two quantities: travel time and person movement. The following sections provide examples of how these measures can be calculated using ITS data from the TransGuide TMC in San Antonio, Texas.



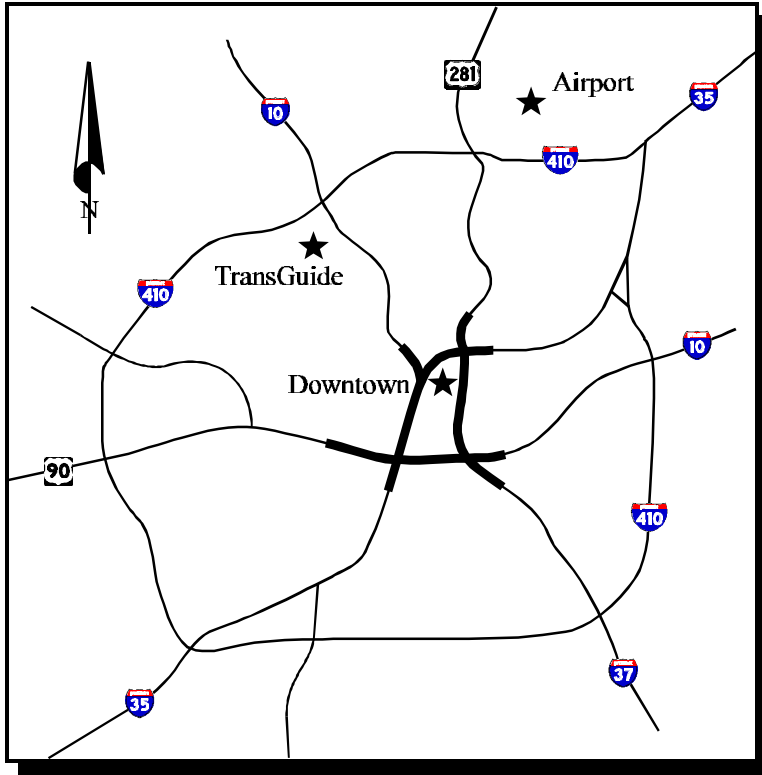

**Figure 3-1. Phase One of TransGuide, San Antonio, Texas**

DATE	TIME	LOCATION	SPEED <sup>a</sup>	VOLUME	OCCUPANCY <sup>b</sup>
07/15/97	07:00:03	L1-0L10E-568.241	Speed=75	Vol=009	Occ=007
07/15/97	07:00:03	L1-0U10E-568.248	Speed=64	Vol=007	Occ=005
07/15/97	07:00:03	L2-0L10E-568.241	Speed=63	Vol=006	Occ=006
07/15/97	07:00:03	L2-0U10E-568.248	Speed=72	Vol=006	Occ=004
07/15/97	07:00:03	L3-0U10E-568.248	Speed=57	Vol=006	Occ=006
07/15/97	07:00:04	EN1-0U10E-568.845	Speed=-1	Vol=006	Occ=018
07/15/97	07:00:04	EX1-0U10E-568.764	Speed=-1	Vol=002	Occ=003
07/15/97	07:00:04	L1-0L10E-568.802	Speed=67	Vol=005	Occ=004
07/15/97	07:00:04	L1-0U10E-568.807	Speed=62	Vol=006	Occ=005
07/15/97	07:00:04	L2-0L10E-568.802	Speed=67	Vol=001	Occ=001
07/15/97	07:00:04	L2-0U10E-568.807	Speed=60	Vol=008	Occ=007
07/15/97	07:00:04	L3-0U10E-568.807	Speed=46	Vol=008	Occ=008
07/15/97	07:00:04	EN1-0010E-569.671	Speed=-1	Vol=003	Occ=006

Notes: <sup>a</sup> Speed=-1 means that no speed has been measured (single loop detector).  
<sup>b</sup> Occupancy is the percentage of time the loop detector is occupied.

**Figure 3-2. Example of Loop Detector Data from TransGuide**

The first measures to be calculated in this example are the point measures of average spot speed and person volume. For this first example, Table 3-2 summarizes these measures for a five-minute time period. Person volume for all these examples can be estimated by assuming an average corridor or sub-regional average. Although the assumed average vehicle occupancy may be the same for freeways in an urban area if no public transit, HOV, or rail facilities exist, the use of person-related performance measures recognizes and emphasizes the importance of multimodal facilities and solutions. In all examples, researchers assumed the average vehicle occupancy to be 1.20 persons per vehicle.

The far right columns in Table 3-2 contain average spot speeds and estimated person volumes on a 20-second basis, whereas the bottom row contains lane-by-lane averages for a 5-minute time period. It should be noted that in the calculation of average speeds, researchers weighted the spot speed observations by the number of persons (which provides a statistically true average speed).

Table 3-3 provides an example of a 15-minute summary that is related to a specific section of freeway. In this example, it has been assumed that the spot speeds obtained at loop detector stations are approximately equivalent to the average travel speeds halfway to the next detector station. In free-flow traffic conditions, this assumption may provide reasonably accurate estimates for link-based measures, but for congested traffic operations and stop-and-go traffic, the assumption may produce inaccurate results.

In Table 3-3, five-minute average speeds and total person volumes are shown, and have been calculated as illustrated in the previous example (Table 3-2). Person movement speed is calculated as the product of person volume and average speed (Equation 3-2). Researchers estimated travel time for the link based upon the average spot speed and the distance to the two adjacent loop detector stations. Finally, researchers calculate person delay by selecting a threshold at which delay or congestion occurs; in this example, researchers selected a congestion threshold at 88.5 kph (55 mph).

Table 3-4 illustrates how data from individual links can be aggregated to obtain corridor performance measures. Average speed and person volume per lane serve as the basic inputs for most corridor performance measures. The corridor mobility index is simply the person speed normalized by a value that represents a typical freeway lane operating at capacity (12). In this example, the normalizing value is 161,000, which represents a typical freeway lane operating at capacity. Index values greater than 1.0 indicate conditions where the speed of person movement is more efficient than regular freeway mainlanes (e.g., HOV lanes or rail lines). Estimated travel times and person delay are calculated as shown in the previous example (Table 3-3). Finally, the person-kilometers and person-hours of travel in congestion are calculated by using the same congestion threshold that was used in calculating person delay. These two corridor/system performance measures relate to the extent of congestion, in that they provide an estimate of how much person travel and time is affected by congestion.

**Table 3-2. Example of Five-Minute Point Summaries of Twenty-Second Loop Detector Data**

Time Starting (a.m.)	Lane 1			Lane 2			Lane 3			Avg. Spot Speed (kph)	Est. Person Volume
	Spot Speed (kph)	Vehicle Volume	Est. Person Volume	Spot Speed	Vehicle Volume	Est. Person Volume	Spot Speed	Vehicle Volume	Est. Person Volume		
7:40:00	42	12	14	40	10	12	56	11	13	46	39
7:40:19	29	9	11	24	10	12	40	8	10	31	33
7:40:39	31	10	12	29	10	12	47	6	7	34	31
7:41:00	32	12	14	40	10	12	42	8	10	37	36
7:41:20	37	11	13	35	9	11	39	12	14	37	38
7:41:40	50	11	13	32	12	14	34	8	10	39	37
7:41:59	39	10	12	29	9	11	47	8	10	38	33
7:42:20	39	14	17	35	8	10	53	8	10	42	37
7:42:40	34	10	12	32	12	14	47	7	8	36	34
7:43:00	39	7	8	18	7	8	34	7	8	30	24
7:43:20	40	13	16	27	8	10	32	7	8	34	34
7:43:39	43	10	12	37	9	11	39	7	8	40	31
7:44:00	42	14	17	35	10	12	42	8	10	40	39
7:44:20	45	13	16	32	10	12	53	8	10	43	38
7:44:40	39	11	13	35	10	12	42	8	10	38	35
<b>Average 7:40-7:45</b>	$\bar{x}=39$	$\Sigma=167$	$\Sigma=200$	$\bar{x}=32$	$\Sigma=144$	$\Sigma=173$	$\bar{x}=43$	$\Sigma=121$	$\Sigma=146$	$\bar{x}=38$	$\Sigma= 519$
$\text{average spot speed, } \bar{S}_i = \frac{\sum \text{spot speed} \times \text{persons}}{\sum \text{persons}} \quad (\text{weighted by persons}) \quad (3-1)$											

Source: San Antonio TransGuide (Station 0035N-152.590), July 15, 1997.

**Table 3-3. Example of Fifteen-Minute Link Summaries of Loop Detector Data**

Starting Time (a.m.)	Average Speed <sup>a</sup> (kph)	Est. Person Volume	Person Movement Speed (person-kphpl)	Est. Travel Time <sup>b</sup> (sec)	Person Delay <sup>c</sup> (person-hr)
7:45 to 7:50	37	506	n.a.	82	6.75
7:50 to 7:55	66	472	n.a.	46	1.57
7:55 to 8:00	91	383	n.a.	33	0.00
Average 7:45 to 8:00 am	$\bar{x} = 62$ kph	$\Sigma = 1,361$ persons or 1,815 pers/phpl	$\bar{x} = 112,530$ person-kphpl	$\bar{x} = 49$ sec	$\Sigma = 8.32$ person-hr

$$person\ movement\ speed = \frac{person\ volume}{(persons\ per\ hour\ per\ lane)} \times average\ speed\ (kph) \quad (3-2)$$

$$estimated\ travel\ time\ (sec.) = \frac{3,600 \times \frac{equivalent\ link\ length\ (km)}{average\ speed\ (kph)}}{average\ speed\ (kph)} \quad (3-3)$$

$$person\ delay\ (person-hr) = \frac{1\ hour}{3,600\ sec} \times \left( \frac{estimated\ travel\ time\ (sec)}{congestion\ threshold\ (sec)} - \frac{travel\ time\ at\ congestion\ threshold\ (sec)}{congestion\ threshold\ (sec)} \right) \times person\ volume \quad (3-4)$$

Source: San Antonio TransGuide (Station 0035N-152.590), July 15, 1997.

- Notes: <sup>a</sup> Average spot speed calculated for each 5-minute period using Equation 3-1.  
<sup>b</sup> Assumes that spot speed approximates time-mean speed over section link length of 0.84 km.  
<sup>c</sup> Assumes that delay is incurred at speeds less than 88.5 kph (travel time greater than 34 sec).

**Table 3-4. Example of Peak Hour Corridor Summaries from Loop Detector Data**

Freeway and Milepost	Equiv. Link Length (km)	Lane-km	Average Speed (kph)	Est. Person Volume per Lane	Person Speed (per-kphpl)	Corridor Mobility Index	Est. Travel Time (sec)	Person Delay (person-hr)	PKT in Congestion	PHT in Congestion
0035N-152.005	0.472	1.415	68	2,040	137,945	0.86	25	10.07	2,887	42.69
0035N-152.590	0.840	2.521	63	1,960	122,859	0.76	48	22.82	4,933	78.57
0035N-153.048	0.824	2.473	74	1,930	142,689	0.89	40	10.50	4,765	64.33
0035N-153.614	0.918	2.753	92	1,760	161,821	1.01	36	0.00	0	0.00
0035N-154.187	0.914	3.658	89	1,350	119,100	0.74	37	0.00	0	0.00
0U35N-154.738	0.858	1.716	72	1,860	134,757	0.84	43	7.99	3,192	44.06
0L35N-154.750	0.858	1.716	71	1,560	110,510	0.69	44	7.54	2,677	37.79
0U35N-155.252	0.906	2.719	79	1,190	93,879	0.58	41	4.45	3,236	41.02
0L35N-155.252	0.897	1.794	77	1,500	115,920	0.72	42	4.41	2,690	34.81
0035N-155.863	0.847	4.234	90	1,190	107,831	0.67	34	0.00	0	0.00
0U35N-156.304	0.662	1.323	81	1,620	130,410	0.81	30	2.41	2,144	26.63
0L35N-156.304	0.596	1.191	85	1,500	127,568	0.79	25	0.75	1,781	20.87
0L35N-156.603	0.726	1.452	89	1,460	129,726	0.81	30	0.00	0	0.00
0U35N-156.684	0.668	2.004	92	910	84,123	0.52	26	0.00	0	0.00
0U35N-157.134	0.720	2.159	89	900	79,990	0.50	29	0.00	0	0.00
0L35N-157.206	0.786	1.571	81	1,410	113,103	0.70	35	2.48	2,208	27.43
0035N-157.578	0.668	3.341	69	1,190	82,522	0.51	35	12.52	3,982	57.52
0035N-158.036	0.736	2.207	76	1,790	135,449	0.84	35	7.57	3,951	52.21
0035N-158.492	0.734	2.937	84	1,310	109,045	0.68	32	2.47	3,825	45.69
0035N-158.947	0.367	1.468	93	1,240	116,025	0.72	14	0.00	0	0.00
<b>Corridor</b>	$\Sigma = 15.00$	$\Sigma = 44.65$	$\bar{x} = 79.9$	$\bar{x} = 1,483$	$\bar{x} = 117,764$	$\bar{x} = 0.73$	$\Sigma = 680$	$\Sigma = 95.99$	$\Sigma = 42,272$	$\Sigma = 573.64$



**Table 3-4. Example of Peak Hour Corridor Summaries from Loop Detector Data (Continued)**

$$\text{lane-km} = \frac{\text{equivalent link length (km)}}{\text{length (km)}} \times \frac{\text{number of lanes}}{\text{of lanes}} \quad (3-5)$$

$$\frac{\text{corridor mobility index}}{\text{mobility index}} = \frac{\text{person speed (person-kphpl)}}{161,000 \text{ (normalizing value)}} \quad (3-7)$$

$$\frac{\text{person-km of travel (PKT) in congestion}}{\text{PKT in congestion}} = \frac{\text{person volume (persons)}}{\text{persons}} \times \frac{\text{equivalent link length}}{\text{link length}} \left[ \begin{array}{l} \text{when average speeds drop} \\ \text{below congestion threshold} \\ \text{(e.g., 88.5 kph)} \end{array} \right] \quad (3-6)$$

$$\frac{\text{person-hours of travel (PHT) in congestion}}{\text{PHT in congestion}} = \frac{\text{person volume (persons)}}{\text{persons}} \times \frac{\text{est. travel time (sec)}}{\text{time (sec)}} \times \frac{1 \text{ hour}}{3,600 \text{ sec}} \left[ \begin{array}{l} \text{when average speeds drop} \\ \text{below congestion threshold} \\ \text{(e.g., 88.5 kph)} \end{array} \right] \quad (3-8)$$



## 4 DEVELOPMENT OF AN ITS DATA MANAGEMENT SYSTEM

This chapter documents the development of an ITS data management system (referred to as ITS DataLink) that is used to store, access, analyze, and present data from the TransGuide center in San Antonio, Texas. Introductory sections present desired features of an ITS data management system which helped guide the researchers in development of a prototype version of ITS DataLink. The chapter provides background information on data warehouses and how they have been applied in enterprise computing environments. The chapter concludes with information and documentation about the prototype version of ITS DataLink.

### 4.1 Background

The previous chapter illustrated the calculation of performance measures from the TransGuide loop detector data. The calculation of performance measures was shown to be straightforward, but there are several issues that arise in retaining, managing, and analyzing ITS data for any purpose:

- **Data storage** - because of the enormous volumes of ITS data being collected, innovative storage and/or aggregation strategies are necessary to keep costs to a reasonable level and within the reach of a typical agency;
- **Database construction** - the potentially large ITS databases cannot be built with most traditional desktop computer-based spreadsheet or database applications;
- **Access to data** - the ITS databases cannot be accessed without using specialized applications or query languages to interact with the database engine;
- **Data versus information** - the sheer size of ITS databases may make it difficult to transform vast amounts of data into smaller, easy-to-understand information; and,
- **Privacy** - the possibility of having ITS data that records the location or traveling patterns of an individual vehicle or person raises some privacy concerns.

Some TMCs do not retain ITS data because of one or more of these issues, or because they haven't recognized the usefulness of the data (see state-of-the-practice review in Chapter 2). The following sections discuss these issues.

#### 4.1.1 Data Storage

The enormous volumes of ITS data being collected require innovative storage and/or aggregation strategies. As of August 1997, the loop detector data is being archived as

compressed ASCII-text files on a computer workstation. Each day of compressed data requires approximately 12 megabytes (MB) of storage space (uncompressed storage requires about 120 MB per day). At this rate of storage, a month of compressed data requires 360 MB (3.6 gigabytes (GB) uncompressed) and a full year of compressed data requires 4.4 GB (44 GB uncompressed). Also, these storage requirements are only for 42 km (26 mi) of freeway in Phase One of TransGuide. Phase Two will more than double the amount of freeway coverage and will necessarily increase the data storage space by roughly the same multiplier. Although database or other formats may slightly decrease the storage space required, it is unlikely that current desktop database applications managing tens of gigabytes of data can be used as an effective data storage and management solution. In addition, the choice of the computer operating system OS for the application is important, as some operating systems are better designed for data intensive tasks than others.

Many large businesses and corporations use large “enterprise-class” relational databases on computer workstations to manage data requiring more than about 5 GB. These large databases are now commonly referred to as “data warehouses” or “data marts.” The SAS Institute defines a data warehouse as a “separate data store in which the data is stored in a format suitable for business intelligence and decision support systems, in which these systems don’t interfere with the performance requirements of operational systems” (13,14). A data mart is a scaled-down version of a data warehouse and typically contains between 5 and 15 GB of data, whereas a data warehouse typically contains more than 30 GB of data. Several software developers (e.g., SAS, Oracle, Sybase, Informix, etc.) are currently marketing data warehouse products that help to manage data marts or data warehouses.

#### *4.1.2 Database Construction*

Because of the potential for large ITS databases (greater than 30 GB), most traditional desktop computer-based spreadsheet or database applications cannot be used to build a data warehouse. Questions of speed, transaction processing time, machine resources, and many others must all be considered when determining the system components for the physical construction of the database.

#### *4.1.3 Access to Data*

Most relational databases require knowledge of a special programming language (e.g., SQL, or structured query language). Ideally, the data warehouse should be accessible to anyone with a desktop computer, without requiring knowledge of programming languages. Again, several software developers have created access interfaces to data warehouses that do not require a specialized programming language. A simple, easy-to-use access interface to a data mart or warehouse enables a wide variety of users to access and analyze the ITS data.

#### 4.1.4 Data Versus Information

The sheer size of ITS databases may make it difficult to convert gigabytes of data to smaller, easy-to-understand information. In many planning applications with ITS data, users may be trying to find patterns or trends over several months or years for the entire freeway system within an urban area. The challenges with large data marts or warehouses are finding and analyzing the appropriate data, then being able to summarize megabytes or gigabytes of data into one useful page of information for managers or decision-makers. This process of finding and summarizing useful information from large databases is referred to as “data mining” (i.e., a useful piece of information is analogous to a small nugget of precious metal).

In a popular computer periodical, Gray elaborates on the future of data management (15):

*“Perhaps the most challenging problem is understanding the data. There is little question that most data will be on-line--because it is both inexpensive and convenient to store it in computers. Organizing these huge data archives so that people can easily find the information they need is the real challenge. Finding patterns, trends, anomalies, and relevant information from a large database is one of the most exciting areas of data management.”*

#### 4.1.5 Privacy

Many privacy advocates are concerned that the advent of the information age means a loss of personal freedom. These advocates are concerned that large databases containing personal information are kept by government agencies, and that the potential exists for individuals or agencies to merge information from different databases and construct a detailed account of their personal information and daily activities or habits, including travel activities. Most advocates are not paranoid enough to think that agencies or individuals are currently misusing existing databases, only that the potential exists for the databases to be misused.

Privacy issues are an important consideration when TMCs collect information about individual vehicles or persons. These tend to be either individual vehicles (e.g. probe vehicles with AVI transponders or GPS receivers) or persons (e.g. smart cards). Typically in the past, information on an individual level was gathered in relation to toll road operations or perhaps on specific studies where drivers have agreed to be probe vehicles or test subjects for data collection. In the future, people may not be aware that vehicle tracking information is being utilized. In all of these cases, information about individual vehicles or persons should either be stored in an anonymous manner (i.e., no way to connect an identification number with a person or vehicle) or not stored at all.

In the current case of TransGuide loop detector data, privacy is not an issue because the system collects no information about individual vehicles or persons. However, the Model Deployment Initiative (MDI) in San Antonio includes the deployment of AVI transponders to

gather link travel times from participating commuters. The travel times collected by these probe vehicles are a potentially rich source of information to transportation planners; however, storage of the data should make the individual probe vehicle transactions anonymous or aggregate the data. Efforts to incorporate this vehicle-based information into the current ITS data management system for San Antonio should protect the privacy of commuters with AVI transponders.

## **4.2 Data Management System Features**

With the above issues in mind, the research team began the design of a prototype ITS data management system (ITS DataLink) that would utilize TransGuide loop detector data. There were several desirable features or attributes for ITS DataLink:

- Ability to store and manage large amounts of data;
- Ability to access the database from remote locations without burdensome or costly software requirements;
- A user-friendly, point-and-click query interface that does not require knowledge of special programming languages or relational database applications;
- Ability to aggregate and summarize data in point, section, and corridor/facility formats;
- Ability to calculate and summarize a given set of performance measures and;
- Ability to output results in a number of different tabular and graphical formats.

The following sections elaborate on these desirable features of the ITS DataLink system.

### *4.2.1 Data Storage*

The researchers agreed that the initial design of the ITS DataLink system should be capable of storing one full year of TransGuide loop detector data. Based on the intended uses of the ITS DataLink system, a decision was made to store the data into five-minute intervals (aggregated from twenty-second periods from the raw data). These design decisions, in addition to the need for additional database application and temporary file storage space, prompted the research team to select a design specification of 20 GB for the ITS DataLink system. At this time, the cost of computer storage has become relatively inexpensive (\$100-200 per GB in 1997 dollars, depending on the computer platform). Table 4-1 contains estimates of approximate data storage space and costs for future expansions of the TransGuide system.

#### 4.2.2 Database Access

It was desirable to have access to the ITS DataLink system from any location without requiring proprietary database software. Many databases require special software to access the system and have licensing requirements for each user. The research team decided to provide access to ITS DataLink using Internet protocols (TCP/IP), so that anyone with Internet access could use the system. Password login procedures are desirable for the ITS Data Link system so user privilege levels can be established.

**Table 4-1. Approximate Storage Space and Costs for One Complete Year of TransGuide Loop Detector Data**

System Extent	Approx. Storage Space <sup>a</sup> (GB)		Approx. Storage Cost <sup>b</sup> (1997 \$)	
	Compressed	Uncompressed	Compressed	Uncompressed
Phase One, 42 km (26 mi)	4.4	44	\$660	\$6,600
Phase Two, 85 km (53 mi)	9.0	90	\$1,350	\$13,500
Complete System, 308 km (191 mi)	32.3	323	\$4,845	\$48,450

Notes: <sup>a</sup> Assumes that 20-second data is saved in ASCII-text format for an entire year.

<sup>b</sup> Assumes that computer storage costs are \$150 per GB (1997 dollars).

#### 4.2.3 User Interface

The ITS DataLink user interface is very important for enabling novice database users to perform a wide range of data queries, from very simple to complex. The research team decided that database users should not be required to know programming or query languages, and that the interface should be a fairly simple, easy-to-use, point-and-click interface. The research team selected a web browser as the interface to ITS DataLink because of its popularity and simplicity of use. Web browsers are increasingly being used to perform complex tasks over the Internet, and even novice computer users generally have experience with using a web browser. Also, Microsoft offers web browser software free of charge on their web site (<http://www.microsoft.com>), and Netscape offers web browser software free of charge to educational and non-profit users (<http://home.netscape.com>).

The Internet is increasingly being recognized as a legitimate tool and location for conducting business. The fastest growing segment of Internet applications is to “web-enable” relational databases which merely means allowing query and/or update capabilities via a web browser interface to the database.

There are thousands of examples of web-enabled databases on the Internet. Some of the more well known transportation examples are the Houston and San Antonio real-time traffic maps. These systems are accessing a database of speed data and displaying it via a graphical summary. Many more examples could be listed but the volume of information makes doing so outside the scope of this report.

#### *4.2.4 Data Aggregation and Summarization*

As described earlier in discussions related to data storage, the loop detector data is stored in the ITS DataLink system in five-minute time periods. The research team agreed that it was desirable to be able to aggregate the data into a number of different time periods for summarization purposes. Researchers selected several aggregation time periods for the query interface, including:

- 5 minutes;
- 10 minutes;
- 15 minutes;
- 20 minutes;
- 30 minutes; and,
- 60 minutes;

In addition to aggregating the data over various time periods, truly useful analyses depend on aggregating the data across freeway facilities as well. As output from the loop detectors in the system, the data represents the smallest spatial resolution--that of a single point on a single lane on the system. To meet the data requirements of multiple applications or uses of the data, the database should have the ability to aggregate to other spatial resolutions, including:

- cross lane;
- corridor, and;
- facility.

The provision of this ability provides the database with the power to serve a number of different purposes, from real-time point analysis to corridor operations and even to long-term planning and congestion monitoring applications.



#### 4.2.5 Calculate Performance Measures

The research team designed the ITS DataLink system to calculate and summarize the performance measures shown in Table 4-2. The table indicates that performance measure can be calculated for three different spatial levels: point, link, and corridor or system. Because the loop detector stations only provide point data, assumptions about homogenous traffic conditions were necessary to convert the point data to link, corridor, and system measures. These assumptions are usually reasonable in free-flow traffic conditions but may be questionable for congested or stop-and-go traffic.

**Table 4-2. Performance Measures in ITS DataLink**

Analysis Level	Performance Measures
<i>Point Measures</i>	spot speed (kilometers per hour) person volume or throughput (persons per hour)
<i>Link-Based Measures</i>	travel time (seconds or minutes) average speed (kilometers per hour) person volume or throughput (persons per hour) person-movement speed (person-kilometers per hour) person delay (person-hours)
<i>Corridor or System Measures</i> (not yet implemented)	average person speed (person-kilometers per hour) total person delay (person-hours) person-km (mi) of travel in congestion (total and percent) person-hours of travel in congestion (total and percent) corridor mobility index roadway congestion index

#### 4.2.6 Tabular and Graphical Output Formats

Any analysis system should be capable of providing performance measure summaries in a number of different formats that are easily interpreted and understood. Tabular formats are fairly common in data summaries and should be made available through this system. Graphical outputs, though, can better illustrate relationships and trends for large volumes of data. It was also desirable to output data in an intermediate format that could be imported into traditional desktop computer-based spreadsheet or database applications. The researchers selected the following output formats as being desirable to include in the ITS DataLink system:

- Tabular or columnar data (viewed in web browser);

- Comma-delimited ASCII text (can be imported into spreadsheet or other database); and,
- Graphical charts in postscript format or portable document format (PDF).

### 4.3 Documentation of the Prototype Data Management System

The ITS DataLink system is currently online at “<http://dasher.cs.tamu.edu>” and has been in “alpha” testing since early 1997 (the site was moved to “<http://vixen.cs.tamu.edu> in early 1998). The ITS DataLink system interface on the web page has undergone several major refinements relating to page organization and query interfaces since going online, and the research team will continue to refine the system interface over the next year (see recommendations in Chapter 6). The web site interface is password-protected at this time, but interested users should contact Mr. Robert Brydia to access the system. Interested users can also submit a request electronically by going to the site and choosing the button labeled “Obtain System Access.”

#### 4.3.1 System Architecture

The ITS DataLink system consists of five major components:

1. Oracle database management system (DBMS);
2. Common Gateway Interface (CGI);
3. Gnuplot graphics software;
4. E-mail service; and,
5. Apache web server.

The Oracle DBMS or relational database is the key component of the system. The database serves as the application which stores the loop detector data. The database also provides some basic statistical and aggregation functions. These functions are supplemented by external programs or scripts that are accessed via CGI, which is an Internet method of calling one program from within another. This is an important capability of the system as it greatly increases the aggregation, statistical, and data manipulation capabilities beyond what is available in the base Oracle software. The programs called from the CGI gateway are truly the heart of the system as they provide the links to all of the various elements. The Gnuplot graphics software, which runs on various Unix computer platforms, is a public domain software which enables the system to produce 1-D, 2-D, and 3-D graphics. The integration of electronic mail service into the site allows users to mail query results to any valid Internet e-mail address and also allows users of the site to provide feedback to the researchers. The entire package is operated through the Apache web server, a public domain Unix-based web server software package.

The research team organized the ITS DataLink system across two Unix workstations from Sun Microsystems. One machine is dedicated to the database, while the other handles the web server functions. In addition to the disk storage requirements of the five-minute data, the Oracle

DBMS occupies about 2 GB of disk space, The external scripts written for the system take approximately 0.5 GB of storage space. Temporary processing space for the queries requires an additional 4 GB of disk storage space. Figure 4-1 shows the physical arrangement of the system. The left side of the drawing, representing the database and web site, shows the various software packages in use. CGI scripts control the interaction between the various packages. The right side of the drawing represents the user side of the system. The only requirements are a web browser with Internet access and the Adobe Acrobat Reader software, both of which are free.

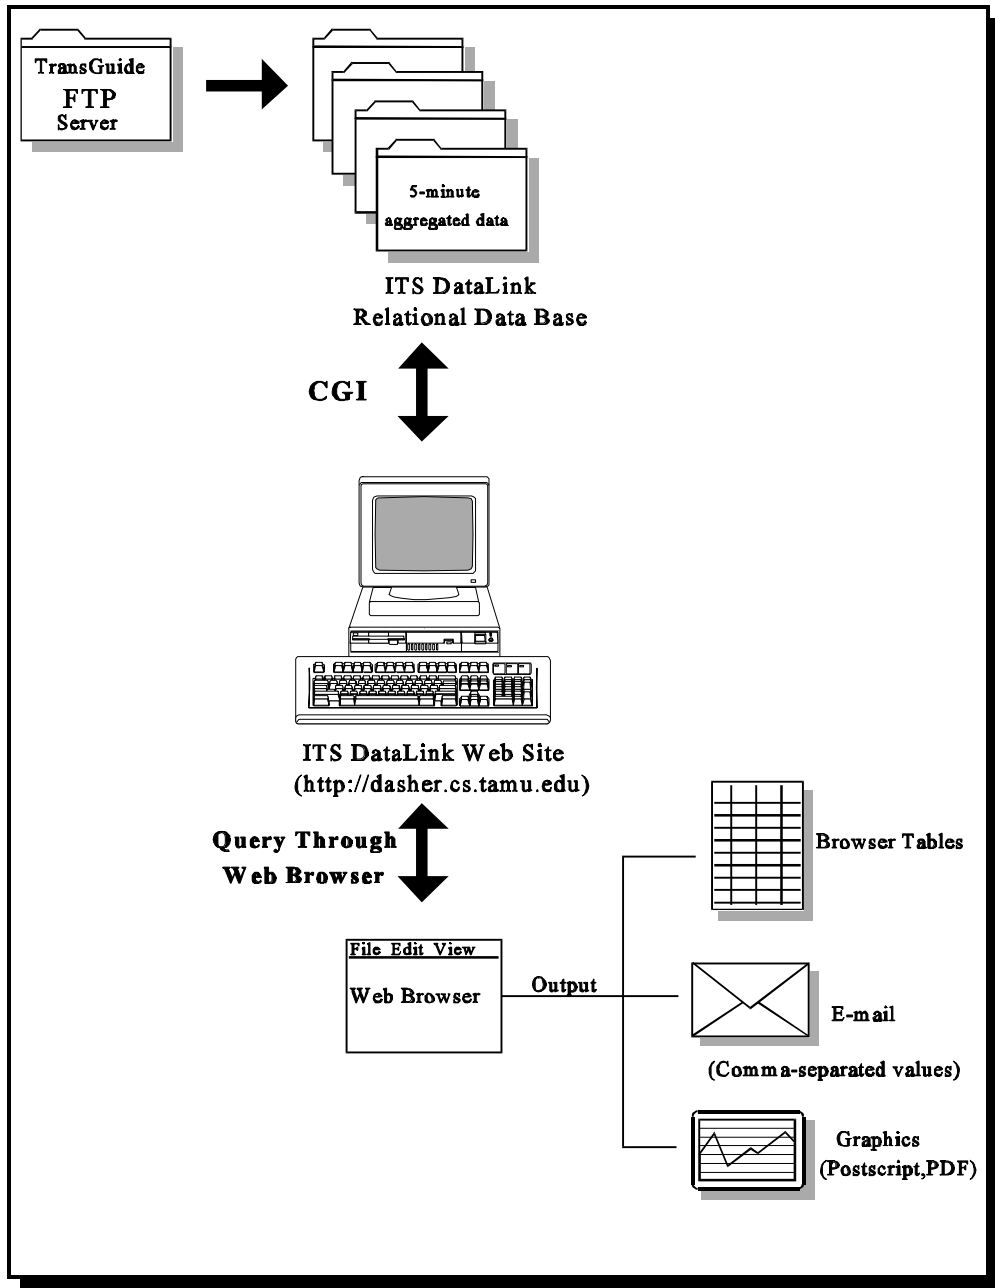


Figure 4-1. Data Flow for ITS DataLink System

#### 4.3.2 *ITS DataLink System Cost*

The ITS DataLink system is highly scalable. The hardware resources utilized by the research team were Sun Sparc workstations configured with 64 megabytes of RAM and a 2 GB hard disk. Typical cost for this configuration is approximately \$6,000 (1997 dollars). While the prototype system employs two workstations, it is possible to use a single workstation to accommodate all of the system software and loop detector data. Increasing the number of workstations helps to distribute the load across various functions and increases the overall system response speed. In addition to two workstations, researchers utilized two external 9 GB disk drives to store the loop detector data. External drives have the advantage of being readily transportable from one workstation to another, depending on system requirements. A tape backup unit capable of backing up the entire system software and data completes the physical hardware setup. Total cost for these items of equipment is approximately \$22,000 (1997 dollars).

Any commercial database server, such as Oracle, Sybase, Informix, and dB2, which supports standard SQL (Structured Query Language) can support the database needs. The choice of Oracle for this application was a choice of prior experience to the researchers as well as attractive pricing versus other available products. With any of the database applications, there is no need for additional programming tools. The researchers do not recommend traditional desktop databases, such as Microsoft Access or Corel Paradox, for this application due to their limitations in handling very large amounts of data.

## 5 FINDINGS AND CONCLUSIONS

This chapter presents the findings and conclusions from this first year of research activity in developing the ITS DataLink system. The research team developed these findings and conclusions based upon their experience in developing and testing the web browser-based data management system.

The findings and conclusions are as follows:

- **Need for a Better Understanding of Data Needs and Uses** - The process of retaining, managing, sharing, and analyzing ITS data for planning and evaluation purposes is not well established among many of the TMCs in the U.S. This research found a disconnect between ITS designers and transportation planners. Improved communication and coordination among these two groups should help to address ITS data retention and sharing issues.
- **Plan for Full Breadth of Performance Measures** - The performance measures typically calculated through ITS data only relate to the efficiency and quality of transportation performance. There are several other important components of transportation performance that should be included in evaluating transportation plans or improvements, such as safety, accessibility, and social equity. Although existing ITS components do not readily collect data for these performance measures, development of future systems should recognize the data needs necessary to develop the full breadth of transportation performance measures.
- **Query Interface Easy to Use** - The research team found that the ITS DataLink web browser interface made data queries substantially easier to perform for novice computer or database users. The web browser interface is essentially point-and-click, which most novice users found substantially simpler than similar SQL-based data queries. However, additional input on the query interface would be desirable for future refinements of the system.
- **Map Query Interface Needed** - The current query interface refers to the freeway locations by abbreviated name (e.g., 0U35N) and milepost (e.g., 152.590). Most users are unfamiliar with the TransGuide Phase One system and need supplemental maps and diagrams to interpret queries and data summaries. A map-based interface could improve users' ability to perform and interpret data queries related to specific locations. The research team was unable to implement this desirable feature because of time constraints during the first year of research.

- **Corridor and System Analyses Needed** - The ITS DataLink system currently performs queries and presents results for point and link-based performance measures. Tools for aggregating data into corridor and system performance measures should be incorporated into future refinements of the ITS DataLink system. These corridor and system measures provide useful information about regional or sub-regional freeway system performance for managers and decision-makers. The research team was unable to implement this desirable feature because of time constraints during the first year of research.
- **Relationship to Data Dictionary Efforts** - Recent research efforts related to the National ITS Architecture have established a data dictionary that defines data elements used or produced by ITS components. There is a need to investigate the relationship of this data dictionary effort to the ITS DataLink system. It was not possible to investigate this relationship during the past year because the data dictionary has been established only recently.

## 6 RECOMMENDATIONS

This chapter summarizes the recommendations for this research, which are based upon the major findings and conclusions presented in Chapter 5. The research team offers these recommendations here as suggestions for future refinements of the ITS DataLink system during the next fiscal year of research activity. The recommendations include the following:

- **Operational Test for TxDOT Users in San Antonio** - The research team recommends that the ITS DataLink system be made accessible to interested TxDOT users in the San Antonio District as an operational test. With a small amount of training and the required passwords, these TxDOT users could have access to the data contained in the ITS DataLink system. The TxDOT users could also provide comments and feedback to refine the web site and query interfaces.
- **Provide Map-Based Query Interface** - The current prototype of the ITS DataLink system identifies loop detector locations by an abbreviated freeway name and milepost. Most users, however, may not be familiar with the freeway or milepost designations. The research team recommends that a map-based query interface be provided to simplify ITS DataLink queries. A map-based query interface would allow users to select links or corridors on a plan view of the TransGuide freeway network.
- **Develop Link Aggregation/Dynamic Segmentation Tools** - The current prototype of the ITS DataLink system provides data summaries on a point and link basis. However, the research team has selected numerous performance measures that are corridor or system-based. Link aggregation or dynamic segmentation tools would enable users to summarize data from selected or all freeways into a single performance measure. These corridor and system measures provide useful information about regional or sub-regional freeway system performance for managers and decision-makers.
- **Investigate Relationship to Data Dictionary Efforts** - The research team should ensure that the ITS DataLink system is consistent with national efforts related to the ITS Architecture and data dictionaries.





## 7 REFERENCES

1. Abrams, C.M. and J.F. DiRenzo. *Measures of Effectiveness for Multimodal Urban Traffic Management, Volume 2: Development and Evaluation of TSM Strategies*. Report No. FHWA-RD-79-113. FHWA, U.S. Department of Transportation, Washington, DC, 1979.
2. Stuart, D.G. and W.D. Weber. Accommodating Multiple Alternatives in Transportation Planning. In *Transportation Research Record 639*, TRB, National Research Council, Washington, DC, 1977, pp. 7-13.
3. Czerniak, R., S. Gaiser, and D. Gerard. *The Use of Intermodal Performance Measures by State Departments of Transportation*. Report DOT-T-96-18. U.S. Department of Transportation, Washington, DC, June 1996.
4. Rutherford, G.S. *Synthesis of Highway Practice 201, Multimodal Evaluation of Passenger Transportation*. National Cooperative Highway Research Program, National Academy Press, Washington, DC, 1994.
5. Cambridge Systematics, Inc. *National Transportation System Performance Measures*. Report DOT-T-97-04. U.S. Department of Transportation, Washington, DC, April 1996.
6. Cambridge Systematics, Inc. "Task B--Initial Performance Measures," In *Metropolitan Planning Technical Report*. Report No. 2. Federal Highway Administration, Washington, DC, July 1994.
7. Lomax, T.J., S.M. Turner, G. Shunk, H.S. Levinson, R.H. Pratt, P.N. Bay, G.B. Douglas. *Quantifying Congestion: Final Report*. National Cooperative Highway Research Program, Washington, DC, March 1997.
8. Lomax, T.J., S.M. Turner, G. Shunk, H.S. Levinson, R.H. Pratt, P.N. Bay, G.B. Douglas. *Quantifying Congestion: User's Guide*. National Cooperative Highway Research Program, Washington, DC, March 1997.
9. Meyer, M.D. *Alternative Performance Measures for Transportation Planning: Evolution Toward Multimodal Planning*. Report No. FTA-GA-26-7000-95-1. Georgia Institute of Technology, Atlanta, GA, December 1995.
10. Ewing, R. Measuring Transportation Performance. *Transportation Quarterly*, Vol. 49, No. 1, Eno Transportation Foundation, Lansdowne, VA, Winter 1995.
11. Turner, S.M., M.E. Best, and D.L. Schrank. *Measures of Effectiveness for Major Investment Studies*. Report No. SWUTC/96/467106-1. Texas Transportation Institute, Southwest Region University Transportation Center, College Station, TX, November 1996.

12. Lomax, T.J. *Transportation Corridor Mobility Estimation Methodology*. Research Report 1131-1. Texas Transportation Institute, Texas A&M University System, College Station, TX, August 1988.
13. “Rapid Warehousing Methodology: An Iterative Approach to Building Your Organization’s Data Warehouse.” White Paper, SAS Institute, Cary, NC, 1996.
14. “The SAS Data Warehouse: Information Systems Management and the Data Warehouse Concept.” White Paper, SAS Institute, Cary, NC, 1996.
15. Gray, Jim. “Evolution of Data Management,” In *Computer*, October 1996, pp. 38-46.