

0-7040: EVALUATION OF CORROSION PREVENTION AND MITIGATION APPROACHES USED ON TEXAS BRIDGES

Background

Corroded steel members cause significant risk to the durability of steel and reinforced concrete bridges in Texas. Prevalent corrosion prevention and mitigation strategies that are employed on state bridges include (a) corrosion-resistant materials such as weathering steel and painted steel elements for steel girders, and (b) epoxy-coated rebar (ECR) and high-performance concrete (HPC) for reinforced concrete decks. The Texas Department of Transportation spends millions of dollars for repair and maintenance of steel and concrete bridges every year; thus, a comprehensive study is essential to evaluate the corrosion resistance of these structures across the state.

What the Researchers Did

The researchers created and validated a Texas corrosion risk assessment map (Figure 1) based on corrosion modeling in which Region 1 corresponds to a low risk of corrosion and Region 6 corresponds to a high risk of corrosion. To assess corrosion prevention and mitigation techniques applied on steel and concrete bridges, over 100 bridges were inspected in depth throughout the state. This inspection included conducting visual inspection and nondestructive evaluation as well as taking concrete cores of these structures. In addition, concrete, steel, paint, and rust samples were collected from the inspected structures for the purpose of conducting further studies and detailed laboratory examinations. A metric was developed to rank the current corrosion and prevention mitigation methods employed on Texas bridges. The researchers developed a decision tool for effective corrosion prevention and mitigation in different regions in Texas and, finally, developed a tool to project the service life of weathering steel bridges.

What They Found

Researchers found the following:

- Weathering steel produces a protective patina in low to moderate corrosive environments. In regions with higher corrosion risks, the patina of weathering steel might be inactive or active (Figure 2).
- A properly maintained Paint System III (consisting of an inorganic zinc primer and epoxy coatings) is preferred over weathering steel in regions with high risk of corrosion. An example of the failure of a paint system is shown in Figure 3.
- A combination of black rebar and concrete with the use of a concrete surface treatment shows reasonable corrosion resistance in low corrosive regions.
- In highly corrosive environments, a combination of ECR with additional mitigation methods such as high-performance concrete (HPC) proved an effective approach to decreasing corrosion activities in reinforced concrete.

Research Performed by:

Texas A&M Transportation Institute (TTI)

Research Supervisor:

Stefan Hurlebaus, TTI

Researchers:

Anna Birely, TTI
Matthew Yarnold, TTI
Arash Noshadran, TTI
Arash Rockey, TTI
Pushkar Shivechchhu, TTI
Seung Hyun Yoon, TTI
Zhen Zhang, TTI

Project Completed:

11-30-2023

- ECR is recommended in the bottom layer of concrete decks for bridge overhangs.
- The quality of the epoxy layer of ECR varies. Better quality control for ECR is recommended.

What This Means

Proper design of corrosion prevention and mitigation strategies for the particular corrosive environment can ensure the long-term durability and service life of bridges, as well as reduce risks associated with corrosion failures of bridge components. It can further save the state millions of dollars on repair and maintenance of these structures.

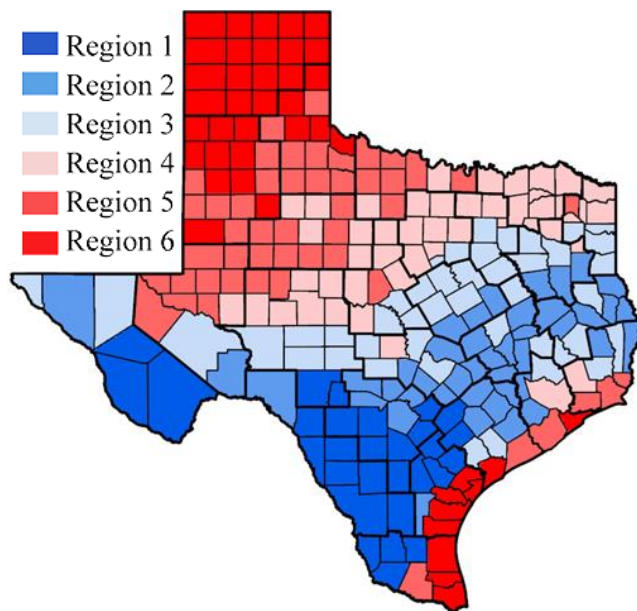


Figure 1. Texas Corrosion Risk Assessment Map.

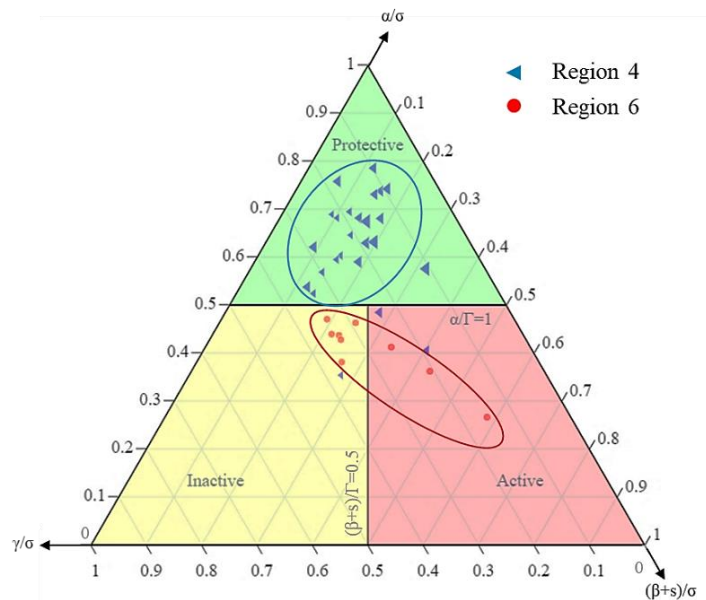


Figure 2. Condition of Protective Patina.



Figure 3. Corrosion on Painted Steel Girder.

For More Information

Project Manager:

Tom Schwerdt, TxDOT, (512) 416-4730

Research Supervisor:

Stefan Hurlebaus, TTI, (979) 845-9570

Project Monitoring Committee Members:

Johnnie Miller, Lianxiang Du, Steven Austin, Rachel Cano, Robert Owens, Sydney Newman, Teresa Michalk, Niya Arowojolu, and Kevin Pruski

Research and Technology Implementation Office

Texas Department of Transportation

125 E. 11th Street

Austin, TX 78701-2483

www.txdot.gov

Keyword: Research

Technical reports when published are available at
<http://library.ctr.utexas.edu>.

This research was performed in cooperation with the Texas Department of Transportation and the Federal Highway Administration. The contents of this report reflect the views of the authors, who are responsible for the facts and accuracy of the data presented here. The contents do not necessarily reflect the official view or policies of FHWA or TxDOT. This report does not constitute a standard, specification, or regulation, nor is it intended for construction, bidding, or permit purposes. Trade names were used solely for information and not for product endorsement.